

DESIGN REVIEW COMMISSION

November 2, 2022 MEETING AGENDA:

- I. CALL TO ORDER
- II. APPROVAL OF AGENDA
- III. APPROVAL OF MINUTES
- IV. OLD BUSINESS NONE
 - a. Commission to make a recommendation for Pamper Me Beauty Spa 763 North Avenue; Parcel No. 13210D A005; New wall sign for new business. Revised design.

V. NEW BUSINESS - ACTION ITEMS

- a. Commission to make a recommendation for Loya Insurance 8079 Tara Boulevard; Parcel No. 13210D A005; Wall sign for new business.
- b. Commission to make a recommendation for Commercial Building 162 South Main Street; Parcel No. 13241D E006; Renovation of existing residence and property for conversion into a restaurant within the Historic District.

VI. ADJOURNMENT





CITY OF JONESBORO, GEORGIA COUNCIL Agenda Item Summary

Agenda Item #

COUNCIL MEETING DATE November 2, 2022

Requesting Agency (Initiator)

Sponsor(s)

Office of the City Manager

Community Development Director Allen

Requested Action (Identify appropriate Action or Motion, purpose, cost, timeframe, etc.)

Commission to make a recommendation for Pamper Me Beauty Spa – 763 North Avenue; Parcel No. 13210D A005; New wall sign for new business. Revised design.

Requirement for Board Action (Cite specific Council policy, statute or code requirement)

City Code Section 86-489 and 86-490 – Sign Standards

Is this Item Goal Related? (If yes, describe how this action meets the specific Board Focus Area or Goal)

Yes

Beautification, Community Planning, Neighborhood and Business Revitalization

Summary & Background

(First sentence includes Agency recommendation. Provide an executive summary of the action that gives an overview of the relevant details for the item.)

Agency recommendation - Approval of revised wall sign panel; Recently, Pamper Me Beauty Spa finalized operations in the "wing" portion of the Kroger shopping center. They want to install a wall sign above the entrance. The original sign design was just one word ("SPA") and one color (blue). The revised design now has the entire name of the business and two colors (white and blue).

The revised wall sign panel is 7.2 feet by 1.5 feet (10.8 square feet), which is well below the maximum 150 square feet allowed in Code Section 86-490(b). The wall sign panel would be about 3.6% of the front business façade, well below the 10% allowed in Code Section 86-489 for double frontage properties. The sign will be internally illuminated and will have a "back glow" behind it. Per the City Code:

Back glow. A neon or other lighted accent on the back of a sign that extends an inch or more from the sign edges.

Prohibited signs, Sec. 86-477: (15) Signs that contain exposed neon or neon accents, including "back glows;"

Therefore, the glow could not extend more than 1 inch from the sign letter. Hibbett's is a good example of the appropriate kind of glow.

Fiscal Impact

(Include projected cost, approved budget amount and account number, source of funds, and any future funding requirements.)

Private Owner

Exhibits Attached (Provide copies of originals, number exhibits consecutively, and label all exhibits in the upper right corner.)

- Building
- Sign Design Original
- Revised Design November 2022
- Acceptance Letter November 2022

FOLLOW-UP APPROVAL ACTION (City Clerk)							
Typed Name and Title	Date						
Ricky L. Clark, City Manager	November, 2, 2022						
Signature	City Clerk's Office	_					
		_					
			Packet Pg 2				

Approval



-

Google Street View - Nate 2022

A Knoger V

Disconnect Switch

Translucent Acrylic – with Translucent Vinyl

LED's

Weep Holes with Light Baffles

.040" Aluminum Backs .040" Aluminum Return — 1" Trimcap


12V Outpu

Power Sup


TBD


Raceway painted to match existing wall


NOTE: CONCEPTUAL IMAG VERIFY ARTWORK AND DIM PRIOR TO FABRICATION




SIDE VIEW



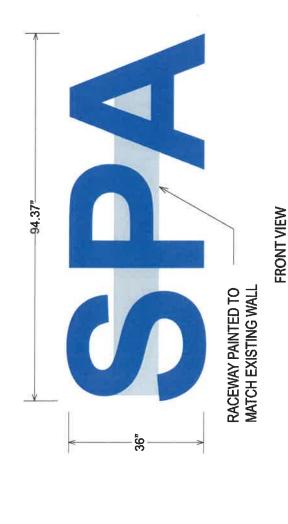

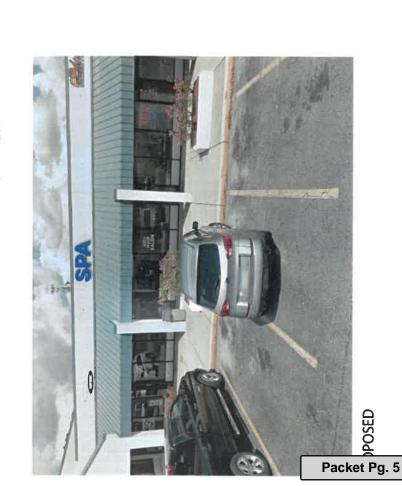

Attachment: Sign Design - Original (3258: 763 North Avenue - Wall Sign)

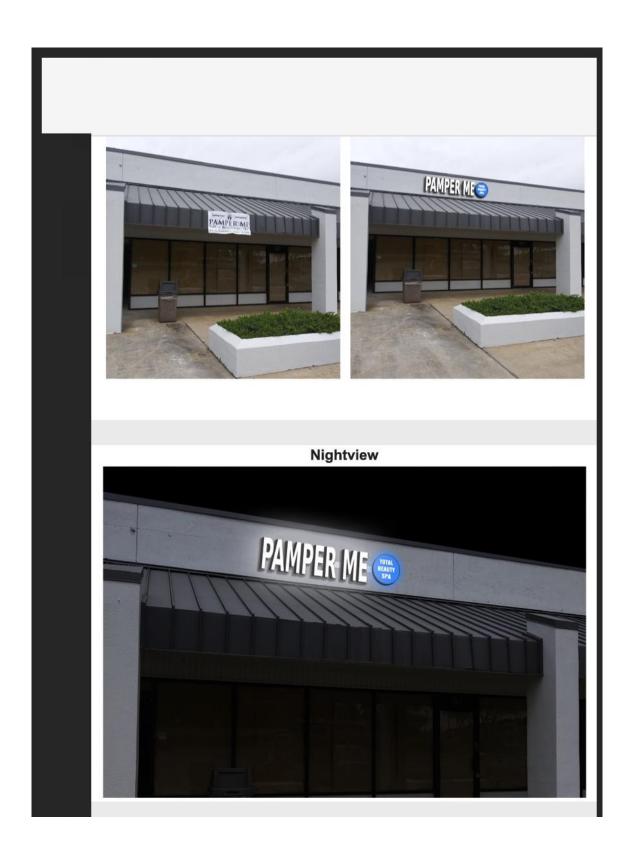





MEMORANDUM

To: LaShondra Swanson

763 North Avenue Jonesboro, Ga 30236

From: David D. Allen

City of Jonesboro 124 North Avenue Jonesboro, GA 30236

Date: October 28, 2022

Re: Notification of Request for Design Review Commission – Wall Sign; 763 North

Avenue; Parcel No. 13210D A005; Revised Design

Dear Applicant,

This letter is to serve as notification that the City of Jonesboro, Design Review Commission, has accepted your request for review of a revised wall sign for the property located at 763 North Avenue, Jonesboro, Georgia.

The review meeting will be conducted by Commission members at 1859 City Center Way on Wednesday, November 2, 2022 at 4:30 pm. You are invited to attend if you wish. If you are unable to be a part of the meeting, then you will be informed of the recommendation on the following day.

Sincerely,

David D. Allen

Community Development Director / Zoning Administrator



5.a



CITY OF JONESBORO, GEORGIA COUNCIL **Agenda Item Summary**

– a

COUNCIL MEETING DATE November 2, 2022

Requesting Agency (Initiator)

Sponsor(s)

Office of the City Manager

Community Development Director Allen

Requested Action (Identify appropriate Action or Motion, purpose, cost, timeframe, etc.)

Commission to make a recommendation for Loya Insurance – 8079 Tara Boulevard; Parcel No. 13210D A005; Wall sign for new business.

Requirement for Board Action (Cite specific Council policy, statute or code requirement)

City Code Section 86-489 and 86-490 – Sign Standards

Is this Item Goal Related? (If yes, describe how this action meets the specific Board Focus Area or Goal)

Yes

Beautification, Community Planning, Neighborhood and Business Revitalization

Summary & Background

(First sentence includes Agency recommendation. Provide an executive summary of the action that gives an overview of the relevant details for the item.)

Agency recommendation – Approval of wall sign; Loya Insurance was recently approved to operate between Hibbett Sports and Dominican Hair Salon at 8079 Tara Boulevard. The applicant has applied for a new wall sign on the parapet over the front entrance.

The wall sign panel will be 28 total square feet, which is below the maximum 150 square feet allowed in Code Section 86-490(b). The panel will be about 9.33% of the front building façade, just below the 10% allowed in Code Section 86-489 for double frontage properties. The red and black color scheme will be compatible with adjacent businesses. The letters will be internally illuminated.

Regarding back lighting, any back glow could not extend more than 1 inch from the sign letters.

Window graphics cannot exceed 25% of total window area for the suite.

Fiscal Impact

(Include projected cost, approved budget amount and account number, source of funds, and any future funding requirements.)

Private Owner

Exhibits Attached (Provide copies of originals, number exhibits consecutively, and label all exhibits in the upper right corner.)

- Acceptance Letter
- Building
- Sign Design

Staff Recommendation (Type Name, Title, Agency and Phone)

Approval

FOLLOW-UP APPROVAL ACTION (City Clerk)								
Typed Name and Title	Date							
Ricky L. Clark, City Manager	November, 2, 2022							
Signature	City Clerk's Office							
			Doolsof Do. O					



MEMORANDUM

To: Lo

Loya Insurance

8079 Tara Boulevard Jonesboro, Ga 30236

From:

David D. Allen

City of Jonesboro 124 North Avenue Jonesboro, GA 30236

Date:

October 28, 2022

Re:

Notification of Request for Design Review Commission - Wall Sign; 8079 Tara

Boulevard; Parcel No. 13210D A005;

Dear Applicant,

This letter is to serve as notification that the City of Jonesboro, Design Review Commission, has accepted your request for review of a sign for the property located at 8079 Tara Boulevard, Jonesboro, Georgia.

The review meeting will be conducted by Commission members at 1859 City Center Way on Wednesday, November 2, 2022 at 4:30 pm. You are invited to attend if you wish. If you are unable to be a part of the meeting, then you will be informed of the recommendation on the following day.


Sincerely,

David D. Allen

Community Development Director / Zoning Administrator







ONZA HINTSHIPE AUNIC

192"

SCALE: N/A

* 21"h LED Front & Backlit Channel Letter of LOYA INSURANCE CO.

* Black Aluminum Backing

* Black Trim & Return

* Raceway: Light Grey w/ A Light Sensor

* A Sign Permit & Installation

Attachment: Sign Design (3259: 8079 Tara Blvd Sign)

28 SQFT WALL SIGN

8079 Tara Blvd Ste. 170

Loya Insurance ATL 24



ADDRESS: 8079 Tara Blvd Ste. 170

SIDE B SIDEA SCALE N/A SOUTH BRACIOUS COMMEN

SIDE B

SIDE A

BEFORE

AFTER



SCALE: 1/2" = 1"

* 2pcs Vinyl Letters Cut


Loya Insurance ATL 24

Attachment: Sign Design (3259: 8079 Tara Blvd Sign) SALES HENRY YANG 915-875-9296 Cell HENRY YANG 915-383-2756 Cell

Packet Pg. 13

LS lee's signs



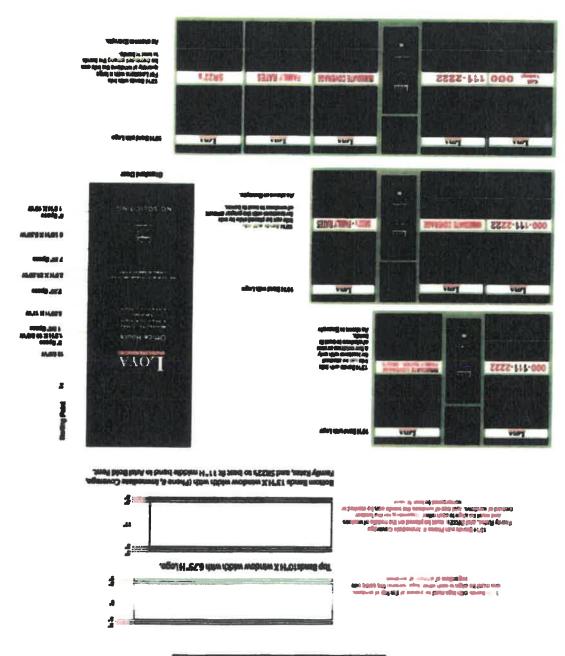

Signage Samples—Window Graphics

EXHIBIL B-3





CITY OF JONESBORO, GEORGIA COUNCIL Agenda Item Summary

Agenda Item #

November 2, 2022

Requesting Agency (Initiator)

Sponsor(s)

Office of the City Manager

Community Development Director Allen

Requested Action (Identify appropriate Action or Motion, purpose, cost, timeframe, etc.)

Commission to make a recommendation for Commercial Building – 162 South Main Street; Parcel No. 13241D E006; Renovation of existing residence and property for conversion into a restaurant within the Historic District.

Requirement for Board Action (Cite specific Council policy, statute or code requirement)

City Code Section 86-103 H-2 Historic District Standards; Secretary of Interior Historic Design Standards

Is this Item Goal Related? (If yes, describe how this action meets the specific Board Focus Area or Goal)

۷۵٥

Economic Development, Community Planning, Neighborhood and Business Revitalization, Historic Preservation

Summary & Background

(First sentence includes Agency recommendation. Provide an executive summary of the action that gives an overview of the relevant details for the item.)

Agency recommendation – Approval of exterior renovations; The 2-story building at 155 North Main Street has served as a residence for many years. The property is zoned H-2 and <u>is</u> in the Historic District. Recently, the applicant requested to convert the vacant residence into a Mexican restaurant.

The main scope of work, as far as exterior is concerned, is as follows:

- 1. Rebuild existing rear deck and provide ADA ramp.
- 2. Convert rear yard into parking area for restaurant.
- 3. Extend existing front porch into front yard and refurbish.
- 4. Repair and replace portions of existing roof where necessary.
- 5. In place of light-blue wood siding, attach "cloud white" brick veneer on the entire exterior.
- 6. Removal of shutters.

Per Section 86-103:

- (I) Design standards. In order to preserve the physical character of existing historic structures in the H-2 historic district, every effort shall be made to adapt the property in a manner that complements the historic character of the area when making exterior alterations to the existing building, site, or environment. New construction shall also be appropriate for the district in design, placement, and scale.
- (1) Rehabilitation. Maintaining the existing historic design, materials, and details of structures in the H-2 district is encouraged. Rehabilitative efforts shall include the use of materials that are compatible with the architectural style of the historic building (see article VII, Architectural style and scale, for guidance on specific historic styles and building materials traditionally found in Jonesboro.)
- a. Roofs. The roof elements (pitch, shape, chimney, etc.) will remain the same. Only periodic repair and patching will be necessary.
- 1. The existing pitch and shape of the roof shall be maintained.
- 2. The shape, style, and placement of historic dormers shall be maintained.
- 3. The addition of dormers to the front facade where none previously existed is prohibited.

FOLLOW-UP APPROVAL ACTION (City Clerk)							
Typed Name and Title	Date						
Ricky L. Clark, City Manager	November, 2, 2022						
Signature	City Clerk's Office						
		_					
			Dookst Da 15				

- 4. Existing roof materials shall be replaced with the same type of historic material or with that which closely resemble existing material.
- 5. Decorative brackets, cornices, and eaves shall be maintained.
- 6. Historic chimneys shall be maintained.
- 7. New chimneys shall use traditional design and materials, and their placement shall be appropriate for the architectural style of the structure.
- b. Building materials.
- Historic building materials shall be maintained. Existing wood siding (light-blue) to be replaced with white brick veneer.
- 2. Unpainted brick facades shall remain unpainted. n/a
- 3. Damaged exterior materials shall be treated with materials that will not cause further deterioration, including the use of a historic mortar mix of an appropriate color when repointing brick. The existing siding is damaged in certain spots. Brick is a more durable material.
- 4. Proper maintenance of all building materials shall adhere to the secretary of interior's standards for rehabilitation and other resources on file with the office of downtown development.
- c. Building color.
- 1. Recommended color shades shall draw from the range of existing color shades and complement the color schemes that already exist in the district. Reference materials on appropriate color palettes will be available for review at the office downtown development at city hall. Light blue to off white. Shades of white are compatible with other similar buildings in the Historic District.
- 2. Neon colors are prohibited. n/a
- 3. Primary colors may be acceptable for trim or accents pending review and approval by the director of downtown development.
- 4. Color patterns shall be consistent with the architectural style of the structure and with the overall historic character of the district.
- d. Foundations. Existing foundation is a mix of concrete and red brick.
- 1. The original design and materials of the foundation, open pier foundation and the porch pier foundation shall be maintained. Not changed for house, although refurbished front porch looks to have an exposed concrete foundation.
- 2. Unpainted historic masonry foundations shall not be painted.
- 3. Concrete block shall not be used as a foundation material. So noted.
- e. Details.
- 1. The addition of architectural details where none previously existed is prohibited. n/a
- 2. Replacement of historic details shall be made with matching material, design, and scale versus stock details. n/a
- 3. The removal of details from a structure is prohibited. Care needs to be given to preserve front window design on the southeast side, as this is a distinctive feature of the house.
- f. Lighting. No information provided for new lighting.
- 1. Lighting fixtures and wattage shall be compatible with the historic character of the structure and the district.
- 2. Lighting placement and wattage shall be configured to prevent glare and to prevent light trespass into residential uses.
- g. Windows.
- 1. Historic windows and window arrangement shall be maintained. So noted.
- 2. Damaged portions of windows, or windows damaged beyond repair, shall be replaced with windows that are comparable in design, size, and materials versus stock windows.
- 3. Flat snap-in muntins, designed to resemble frames that hold panes of glass in a window, are discouraged.
- 4. New windows on side elevations shall be compatible with historic windows in terms of materials, size, and design.
- 5. Storm windows shall match the color of the window frame and obscure the window as little as possible.
- 6. The addition of windows where none previously existed is discouraged.
- 7. The addition of shutters that are not compatible with the window size and shape is discouraged.
- h. Doors.
- 1. Historic doors and door placement shall be maintained. So noted.
- 2. Damaged portions of doors, or doors damaged beyond repair, shall be replaced with doors that are comparable in design, size, and materials versus stock doors.
- 3. New doors on side elevations shall be compatible with historic doors in terms of materials, size, and design.

5. The addition of doors, sidelights, transoms, fanlights, or other decorative features where none previously existed discouraged.

- i. Porches.
- 1. The design, materials, roof supports and balustrades and roof shape of historic porches shall be maintained. These shall be updated and improved.
- 2. The addition of front porches where none previously existed is discouraged. The existing front porch shall be enlarged but has always existed.
- 3. The addition of decorative elements, if desired, shall be consistent with the base architectural style of the structure.
- 4. Replacement of historic porch features shall be made with matching material, design, and scale versus stock features. These shall be updated and improved.
- 5. Porch floors and foundations shall not be replaced with slab concrete or brick. So noted.
- 6. The enclosure of front or side porches shall be prohibited. So noted.
- 7. The design and installation of ADA-compliant ramps onto a front porch shall seek to preserve the historic character of the buildings. Section 4.1.7 Accessible Buildings: Historic Preservation of the ADA Accessibility Guidelines, and resources of the office of downtown development, shall be used as resource guides. The ramp shall be located in the rear.
- j. Walls and fences.
- 1. Historic fencing and walls shall be maintained.
- 2. Materials and design of fencing and walls shall be appropriate to the dwelling and to the district. Examples of appropriate materials are wood for fencing and stone for retaining walls. The use of chain link fencing material is prohibited.
- k. Walks and drives.
- 1. Historic walks and drives shall be maintained.
- 2. New walks and drives shall use traditional placement and materials that are appropriate to the dwelling and to the district. The use of gravel is prohibited.
- 3. Parking shall be located to the rear of the dwelling or to the side behind the facade line of the dwelling.
- I. Other features.
- 1. Mechanical systems (including but not limited to air conditioning units and satellite dishes), recreational equipment (including but not limited to pools and semi-permanent play structures), and decks shall be placed to the rear of the property so as to minimize visibility from the public view. Any mechanical systems that must be located on the roof shall be placed to the rear of the roof.
- 2. Skylights shall be located to the rear of the roof and shall not be within public view.
- 3. Compatible fencing or vegetation shall be used to screen features that are located to the rear of the property.
- 4. Utility meters shall be placed unobtrusively.
- 5. For commercial or office-zoned properties in the district, dumpsters shall be placed to the rear of buildings and shall be screened from public view by appropriate fencing, vegetation or walls.

While the house has always had wood siding, it has deteriorated through the years. The addition of the brick veneer would be a fresher, more durable upgrade. Respect must be given to existing window and porch designs.

- 1. Repair and patching of roof shall match existing material and color.
- 2. Provide accent uplighting on building and night-sky friendly lighting on property.
- 3. Porch floors and foundations shall not be replaced with slab concrete or brick.
- 4. Historic windows and window arrangement shall be maintained.
- 5. Historic doors and door placement shall be maintained.
- Parking lot shall be paved and not gravel.
- 7. A landscape plan shall be provided.

Fiscal Impact

(Include projected cost, approved budget amount and account number, source of funds, and any future funding requirements.)

Private owner

Exhibits Attached (Provide copies of originals, number exhibits consecutively, and label all exhibits in the upper right corner.)

- Existing House
- 162 MAIN STREET 10-22-22 Design
- Acceptance Letter

Staff Recommendation (Type Name, Title, Agency and Phone)

Approval, with Conditions

Google Maps 162 S Main St

10/21/22, 11:40 AM

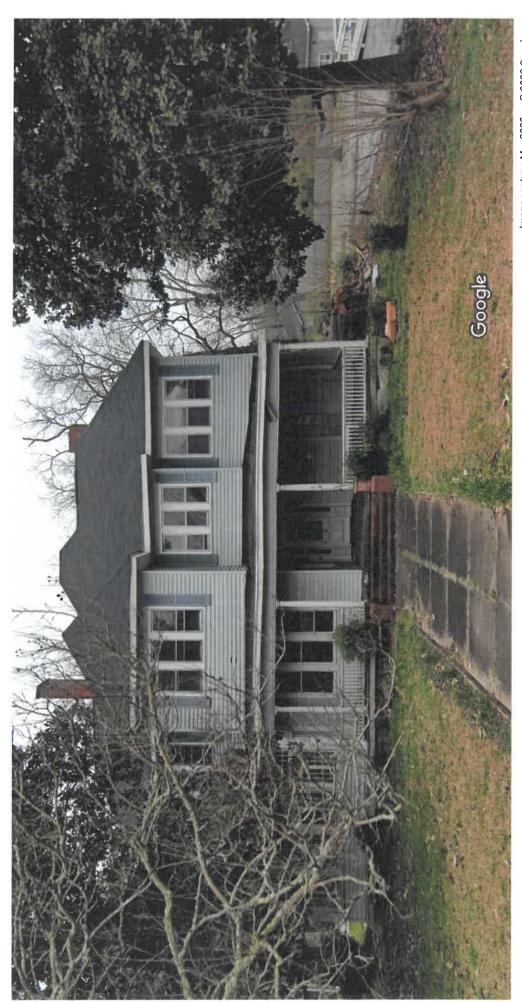


Image capture: Mar 2022 © 2022 Google

162 S Main St

₹

Street View & 360°

10/21/22, 11:40 AM




Attachment: Existing House (3260 : 162 South Main Street Renovation)


Street View & 360°

Ħ

Packet Pg. 20

162 S Main St



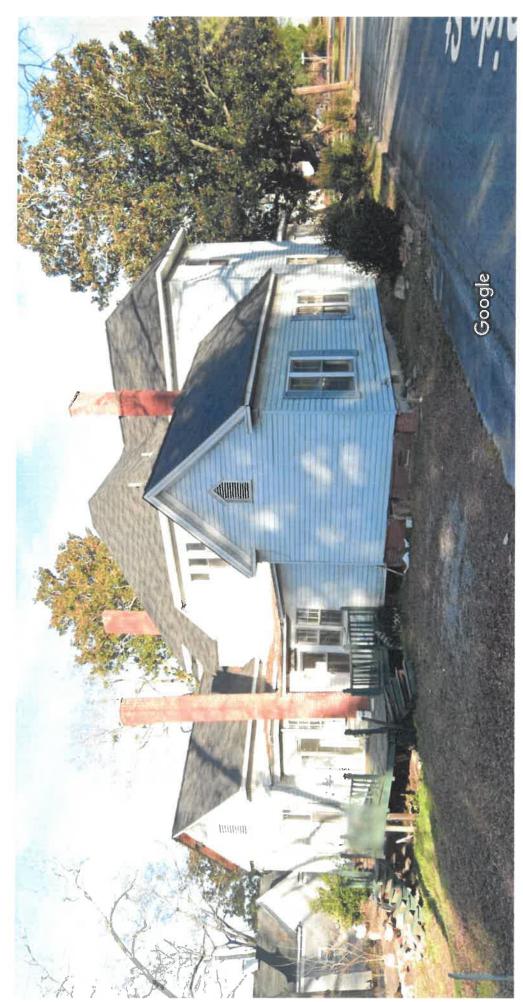


limage capture: Jan 2022 @ 2022 Google

162 S Main St

A

Street View & 360°

Google Maps 100 Burnside St

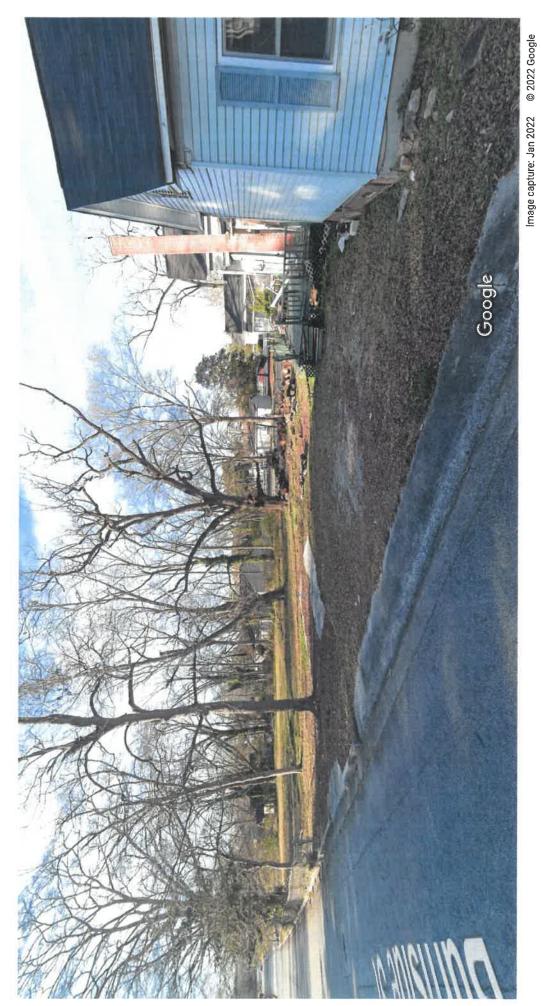

162 S Main St

Street View & 360°

Ŧ

Google Maps 158 S Main St

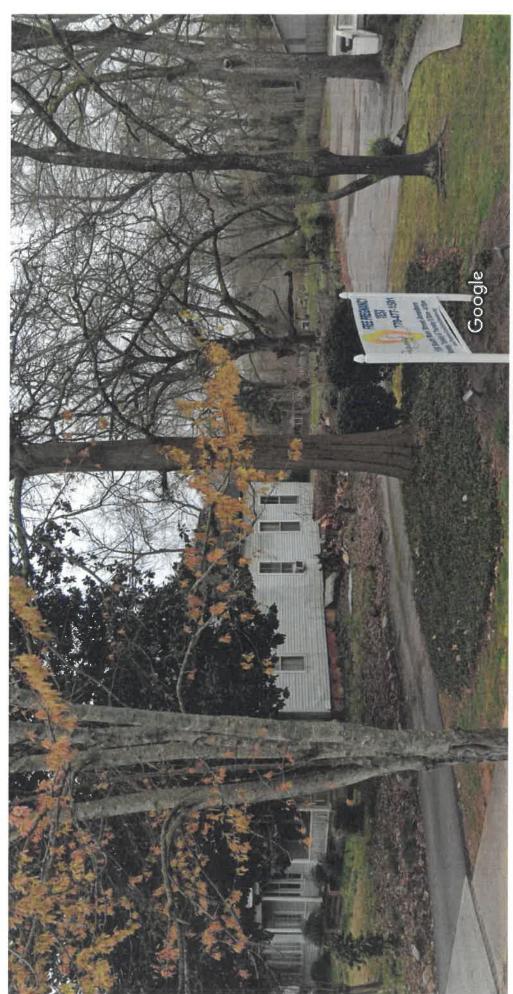


Image capture: Mar 2022 @ 2022 Google

162 S Main St

Street View & 360°

₹

A1 - COVER SHEET, ABBREVIATIONS & SYMBOLS

A2 - LOCATION PLAN

A3 - DEMOLITION PLAN

A4 - MAIN & FIRST FLOOR PROPOSED LAYOUT

A5 - EXTERIOR ELEVATIONS

A6 - EQUIPMENT LAYOUT MAIN FLOOR

A7 - LIFE & SAFETY MAIN FLOOR LAYOUTS

A8 - LIFE & SAFETY FIRST FLOOR LAYOUT

A9 - PLUMBING RISER DIAGRAM

A10 - SPAN TABLES & FRAMING NOTES

A11 - FRAMING DETAIL

A12 - ADA DETAILS

A13 - GENERAL NOTES

PROJECT NAME: PROPOSED RESTAURANT

PROJECT ADDRESS 162 S MAIN STREET JONESBORO, GA 30236

PROJECT DESCRIPTION
MODIFICATIONS TO EXISTING
BUILDING TO ACCOMODATE A
RESTAURANT

OCCUPANCY CLASSIFICATION:
ASSEMBLY A2
BUILDING CONSTRUCTION TYPE: VA
UNSPRINKLERED
OCCUPANT LOAD = 148
TOTAL AREA = 4633 SF

APPLICABLE CODES:


INTERNATIONAL BUILDING CODE: 2018 EDITION, WITH GEORGIA AMENDMENTS INTERNATIONAL FIRE CODE: 2018 EDITION, WITH GEORGIA AMENDMENTS INTERNATIONAL PLUMBING CODE: 2018 EDITION, WITH GEORGIA AMENDMENTS INTERNATIONAL MECHANICAL CODE: 2018 EDITION, WITH GEORGIA AMENDMENTS INTERNATIONAL FUEL GAS CODE: 2018 EDITION, WITH GEORGIA AMENDMENTS NATIONAL ELECTRICAL CODE: 2020 EDITION, WITH NO GEORGIA AMENDMENTS INTERNATIONAL ENERGY CONSERVATION CODE: 2015 EDITION, WITH GEORGIA SUPPLEMENTS AND AMENDMENTS

NFPA 101: LIFE SAFETY CODE 2018 WITH GEORGIA AMENDMENTS

ABBREVIATIONS

А	AMP	Д	AMP
AC	AIR CONDITIONING	AC	AIR CONDITIONING
AFF	ABOVE FINISHED FLOOR	AFF	ABOVE FINISHED FLOOR
AFG	ABOVE FINISHED GRADE	AFG	ABOVE FINISHED GRADE
APPROX	APPROXIMATELY	APPROX	APPROXIMATELY
APS	ARIZONA POWER SERVICE	APS	ARIZONA POWER SERVICE
ATCT	AIRPORT TRAFFIC CONTROL TOWER	ATCT	AIRPORT TRAFFIC CONTROL TOWER
ATS	AUTOMATIC TRANSFER SWITCH	ATS	AUTOMATIC TRANSFER SWITCH
AUX	AUXILIARY	AUX	AUXILIARY
AWG	AMERICAN WIRE GAUGE	AWG	AMERICAN WIRE GAUGE
ВАТ	BATTERY	ВАТ	BATTERY
BC	BARE COPPER	ВС	BARE COPPER
BKR	BREAKER	BKR	BREAKER
BLDG	BUILDING	BLDG	BUILDING
С	CONDUIT	С	CONDUIT
CD	CEILING DIFFUSER	CD	CEILING DIFFUSER
CFM	CUBIC FEET PER MINUTE	CFM	CUBIC FEET PER MINUTE
CHGR	CHARGER	CHGR	CHARGER
CKT	CIRCUIT	CKT	CIRCUIT
CO	CONDUIT ONLY	СО	CONDUIT ONLY
CONV	CONVENIENCE	CONV	CONVENIENCE
COR	CONTRACTOR ON SITE REPRESENTATIVE	COR	CONTRACTOR ON SITE REPRESENTATIVE
DB	DRY BULB	DB	DRY BULB
DIA	DIAMETER	DIA	DIAMETER
DISTR	DISTRIBUTION	DISTR	DISTRIBUTION
EG	EMERGENCY GENERATOR / EXHAUST GRILLE	EG	EMERGENCY GENERATOR / EXHAUST GRILLE
EQUIP	EQUIPMENT	EQUIP	EQUIPMENT
ETVS	ENHANCED TERMINAL VOICE SWITCH	ETVS	ENHANCED TERMINAL VOICE SWITCH
EXT	EXTERNAL	EXT	EXTERNAL
FIN	FINISHED	FIN	FINISHED
GA	GAUGE	GA	GAUGE
GALV	GALVANIZED	GALV	GALVANIZED
GFE	GOVERNMENT FURNISHED EQUIPMENT	GFE	GOVERNMENT FURNISHED EQUIPMENT
GND	GROUND	GND	GROUND
GRN	GREEN	GRN	GREEN
GRSC	GALVANIZED RIGID STEEL CONDUIT	GRSC	GALVANIZED RIGID STEEL CONDUIT
GYP	GYPSUM	GYP	GYPSUM
HGT	HEIGHT	HGT	HEIGHT
ID	INSIDE DIAMETER	ID	INSIDE DIAMETER
KAIC	KILOAMPS INTERRUPTING CURRENT, SYMMETRICAL	KAIC	KILOAMPS INTERRUPTING CURRENT, SYMMETRICAL

DRAWING SYMBOLS

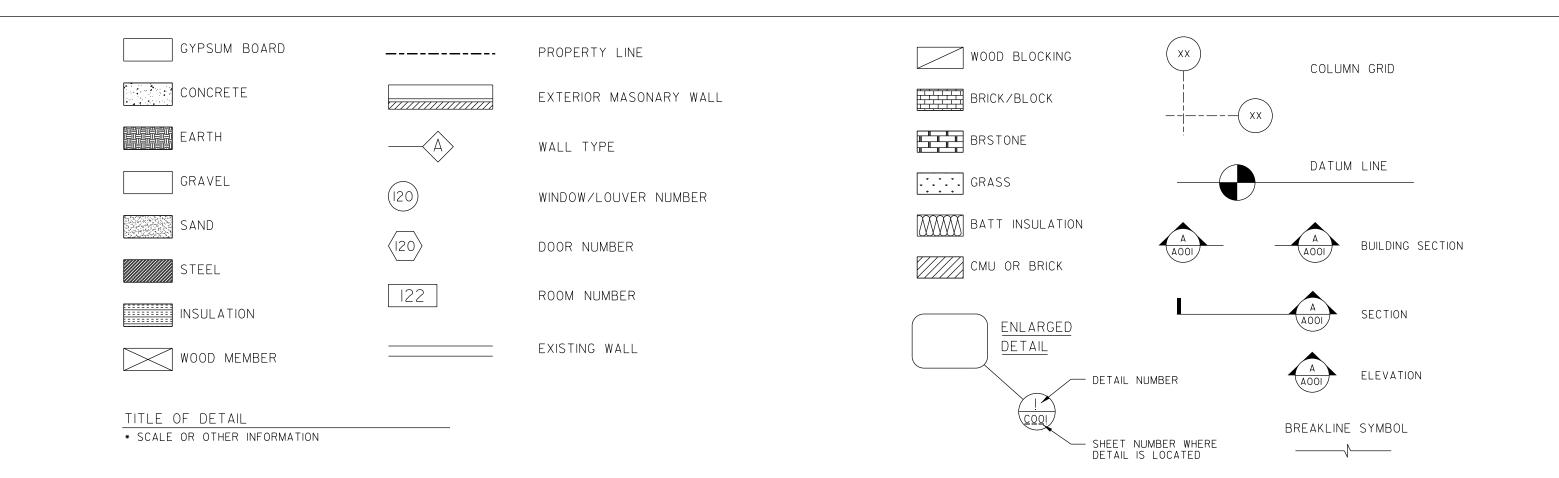


MFGR

MANUFACTURER



5.b.b

FOR INFORMATION C	ALBERT SOLANO 7675 TARA BLV Jonesboro, GA	
LOCATION	162 S MAIN STREET Jonesbord, ga 30236	Attachment: 162 MAIN STREET 10-22-22 Design (3260 : 162 South Main Street Renovation)
SHEET TITLE	COVER SHEET, ABBREVIATIONS & SYMBOLS	Attachment: 162 MAIN STREET
NO 1 2 3 Dat Sca		

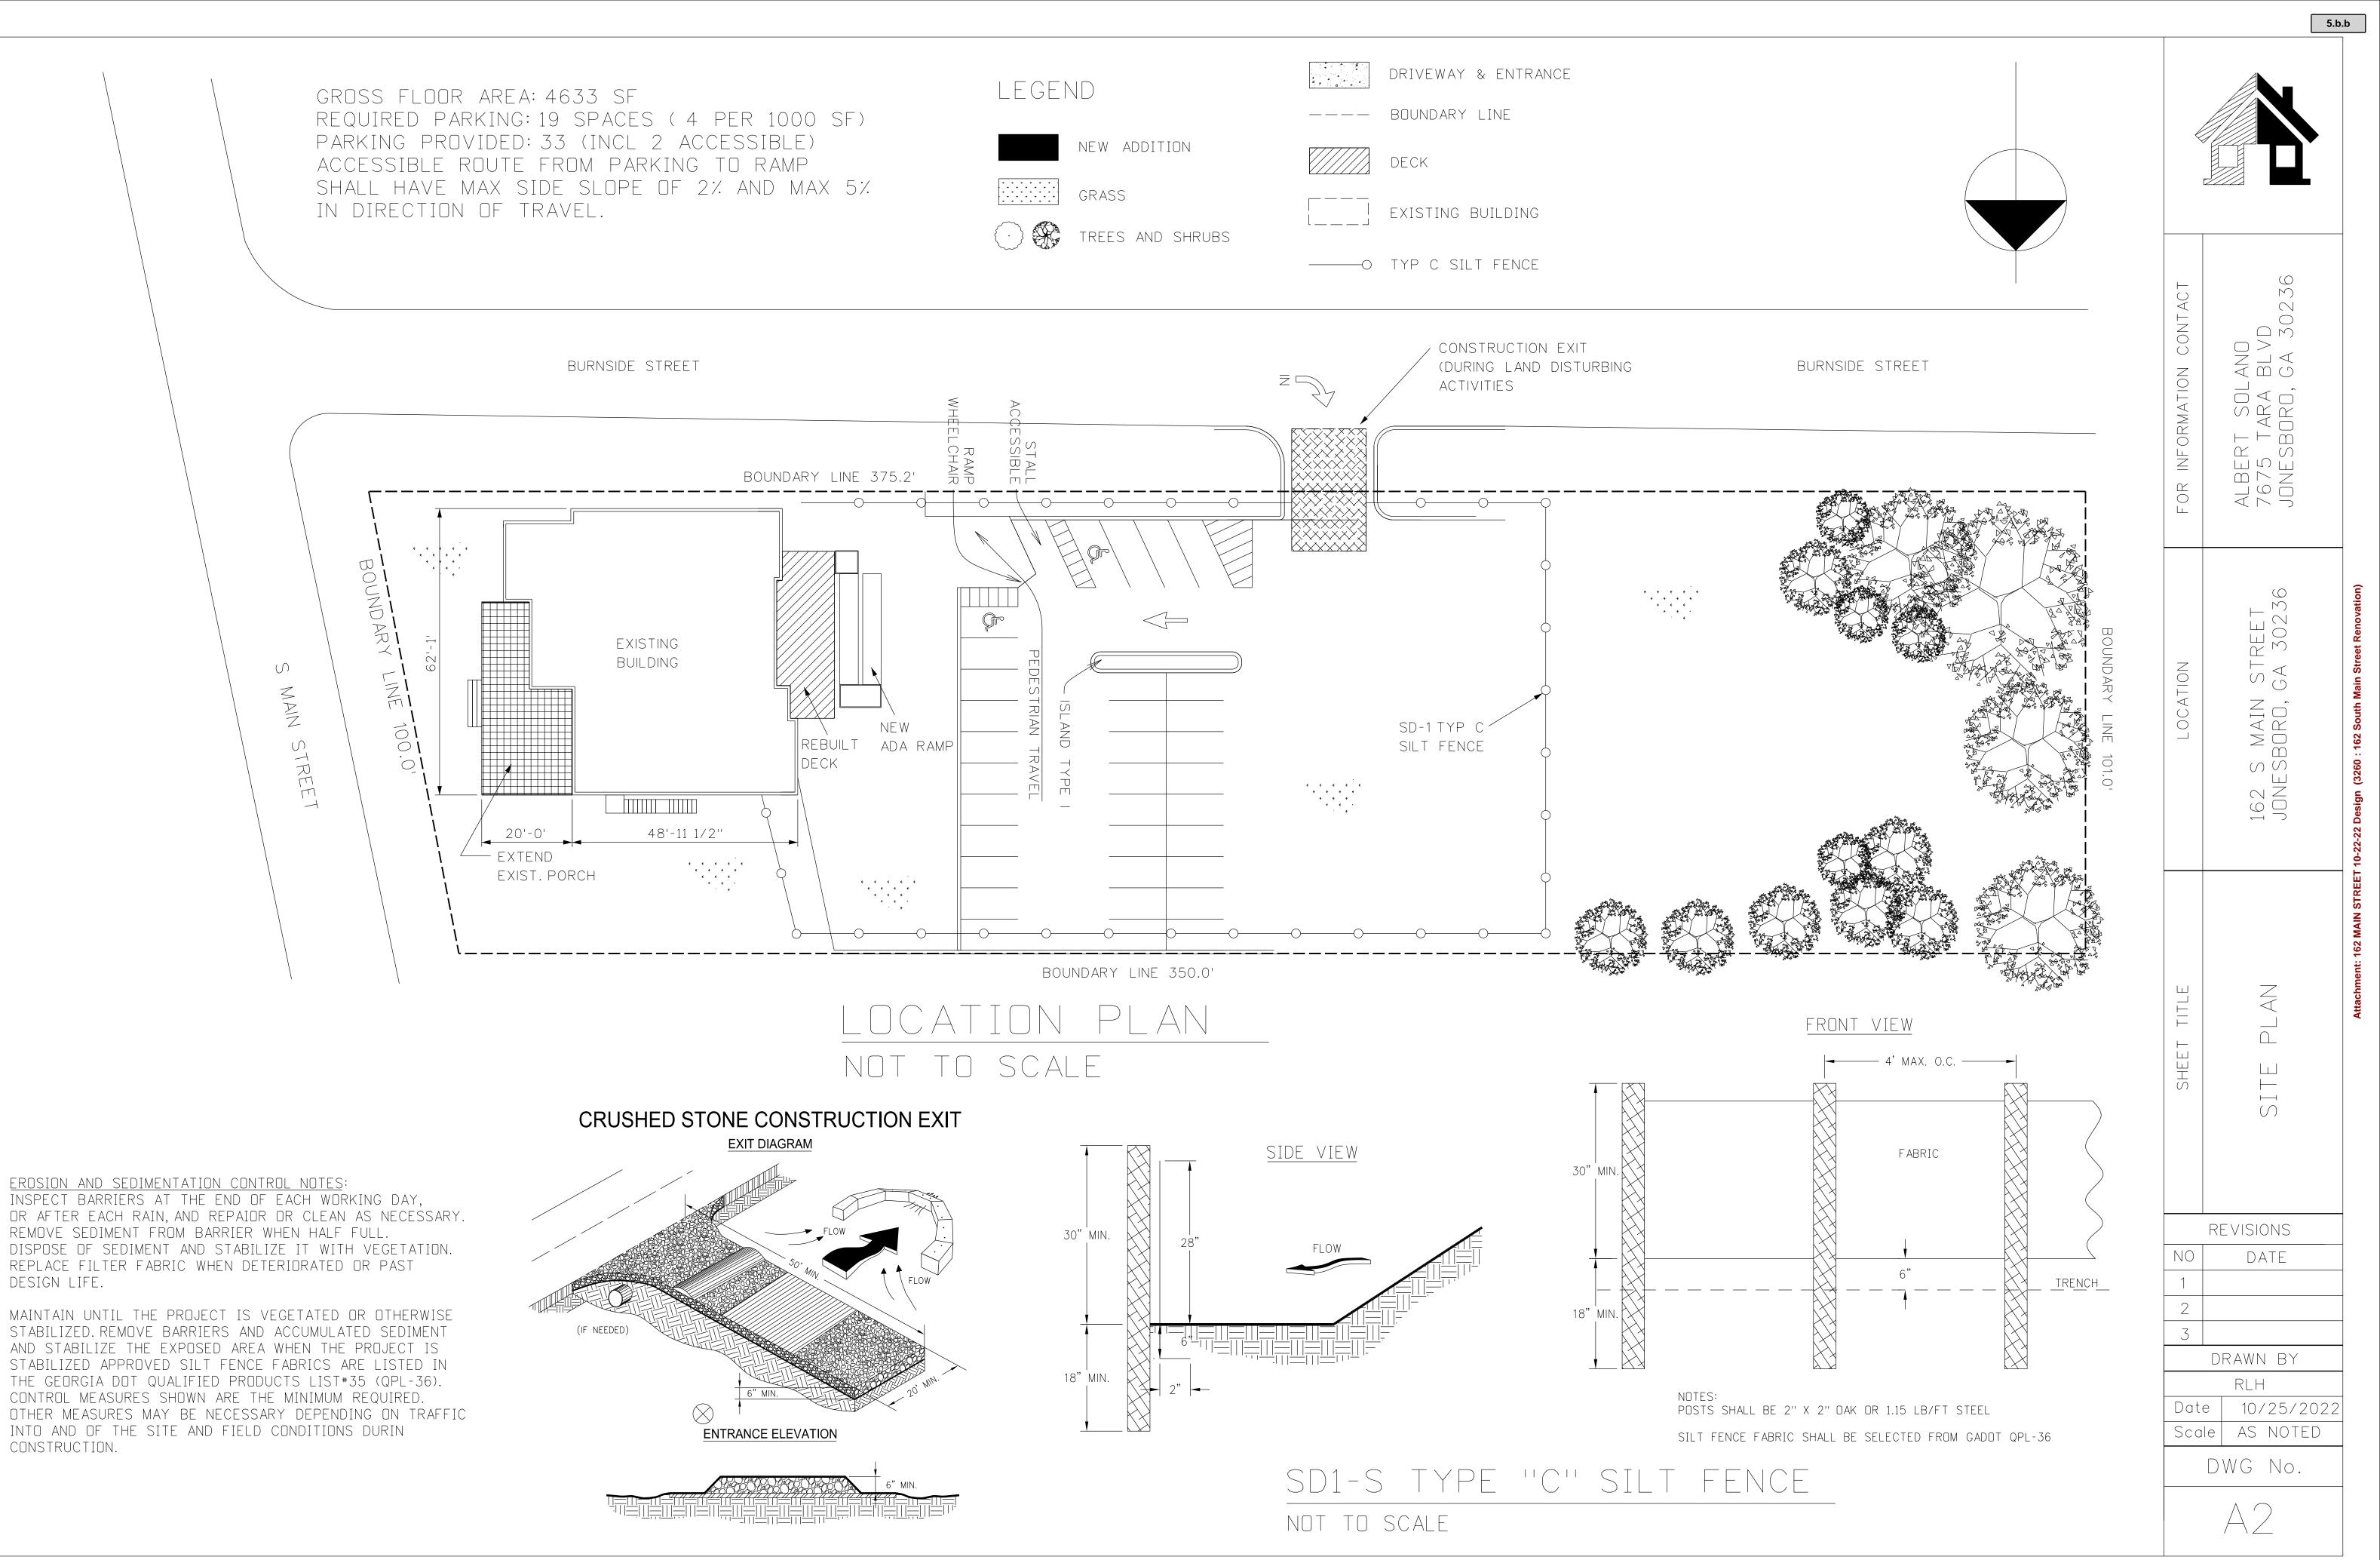

(D)

ALBERT SOL, 7675 TARA JONESBORO, (

 $\frac{\text{DEMOLITION PLAN}}{3/16"} = 1"-0"$

NOTES:

CONTRACTOR SHALL INSPECT FOUNDATIONS AND REPAIR, UPGRADE OR REPLACE FAULTY SECTIONS INCLUDING UNDERPINNING AS REQUIRED.

CONTRACTOR SHALL VERIFY GAS, ELECTRICAL AND PLUMBING REQUIRE MENTS PRIOR TO BEGINNING OF ROUGH-IN WORK.

PROVIDE ACCESSIBILITY FOR THE PHYSICALLY HANDICAPPED CONFORMING TO THE AMERICANS WITH DISABILITIES ACT, INCLUDING PARKING SPACES, RAMPS, DOOR AND TOILET HARDWARE AND SIGNAGE AND SYMBOLS.

DO NOT SCALE DRAWINGS. USE WRITTEN DIMENSIONS ONLY. SUBMIT TO ENGINEER ANY DISCREPANCIES FOR CLARIFICATION.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR BUILDING THIS PROJECT IN ACCORDANCE WITH THE DRAWINGS AND SPECIFICATIONS UNLESS A WRITTEN NOTIFICATION FROM THE OWNER OR ENGINEER TO THE CONTRARY IS RECEIVED.

THE LOCATION OF THE EXISTING UTILITIES AND STRUCTURES WHERE SHOWN HEREON ARE APPROXIMATE. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY THE EXISTENCE AND ACTUAL LOCATION OF SUCH, WHETHER SHOWN HEREON OR NOT, PRIOR TO ANY EXCAVATION. ANY DAMAGES SHALL BE REPAIRED AT THE EXPENSE OF THE CONTRACTOR.

BY ENTERING INTO AN AGREEMENT WITH THE OWNER AND OR UNDERTAKING THIS WORK, THE CONTRACTOR REPRESENTS THAT HE HAS VISITED THE JOB SITE, FAMILIARIZED HIMSELF WITH EXISTING CONDITIONS AND NOTED ANY DISCREPANCIES WITH THE CONTRACT DRAWINGS AND OTHER DOCUMENTS.

CONTRACTOR SHALL BRING ANY DISCREPANCIES TO THE OWNER'S ATTENTION PRIOR TO PROCEEDING AND MAY SUBMIT PROPOSAL FOR RESOLVING ALONG WITH ANY ADDITIONAL COST OR COST REDUCTION DETAILS IF APPLICABLE.

CONTRACTOR SHALL INDEMNIFY, DEFEND AND SAVE HARMLESS, OWNER ENGINEER AND ENGINEER'S AGENT FROM ALL CLAIMS, SUITS, OR ACTIONS OF EVERY NAME, KIND, AND DESCRIPTION, RESULTING FROM CONTRACTOR'S CONDUCTANCE OF THE WORK.OWNER ACCEPTS THESE PLANS AND PROCEEDS WITH THIS WORK WITH THE UNDERSTANDING THAT ENGINEER'S LIABILITY FOR ERRORS OR OMISSIONS IS LIMITED TO THE FEE PAID BY OWNER TO ENGINEER OR HIS AGENT FOR THESE PLANS.

LOCATION
162 S MAIN STREET
JONESBORD, GA 30236

REVISIONS

DRAWN BY

RLH

Date 10/25/2022

Scale AS NOTED


DWG No.

DATE


LEGEND:

EXISTING WALLS TO REMAIN

EXISTING WALLS TO BE REMOVED

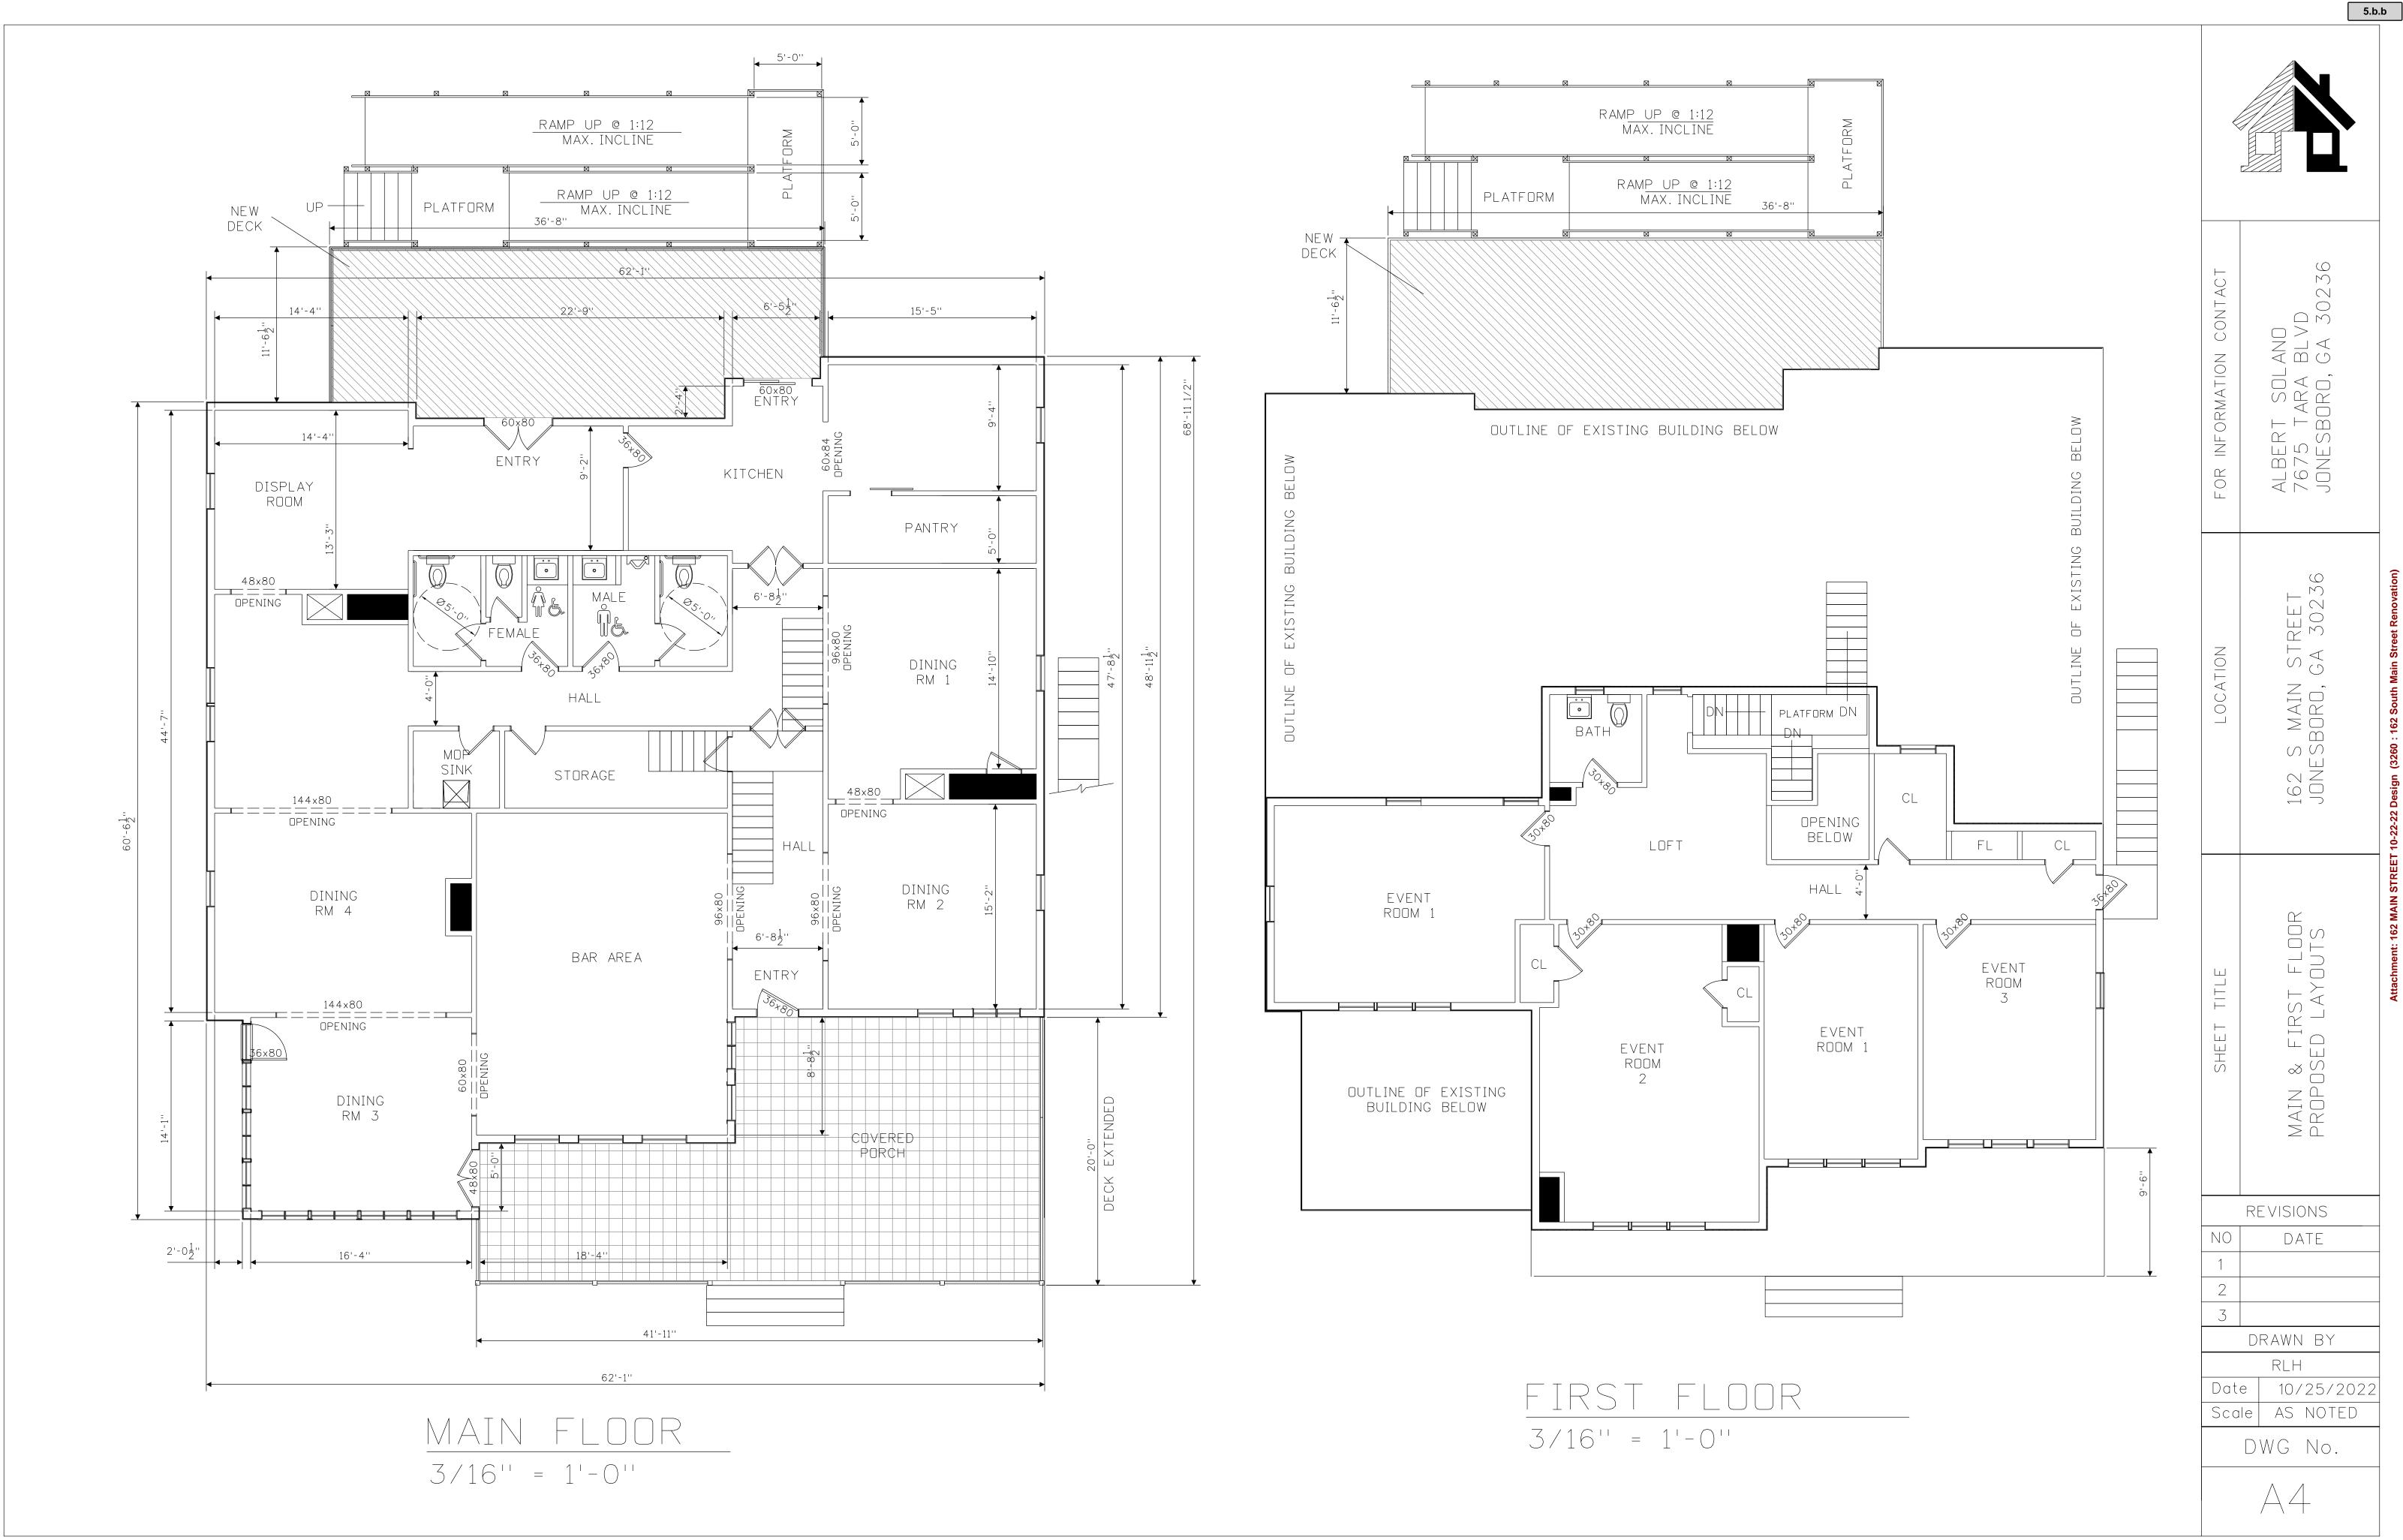




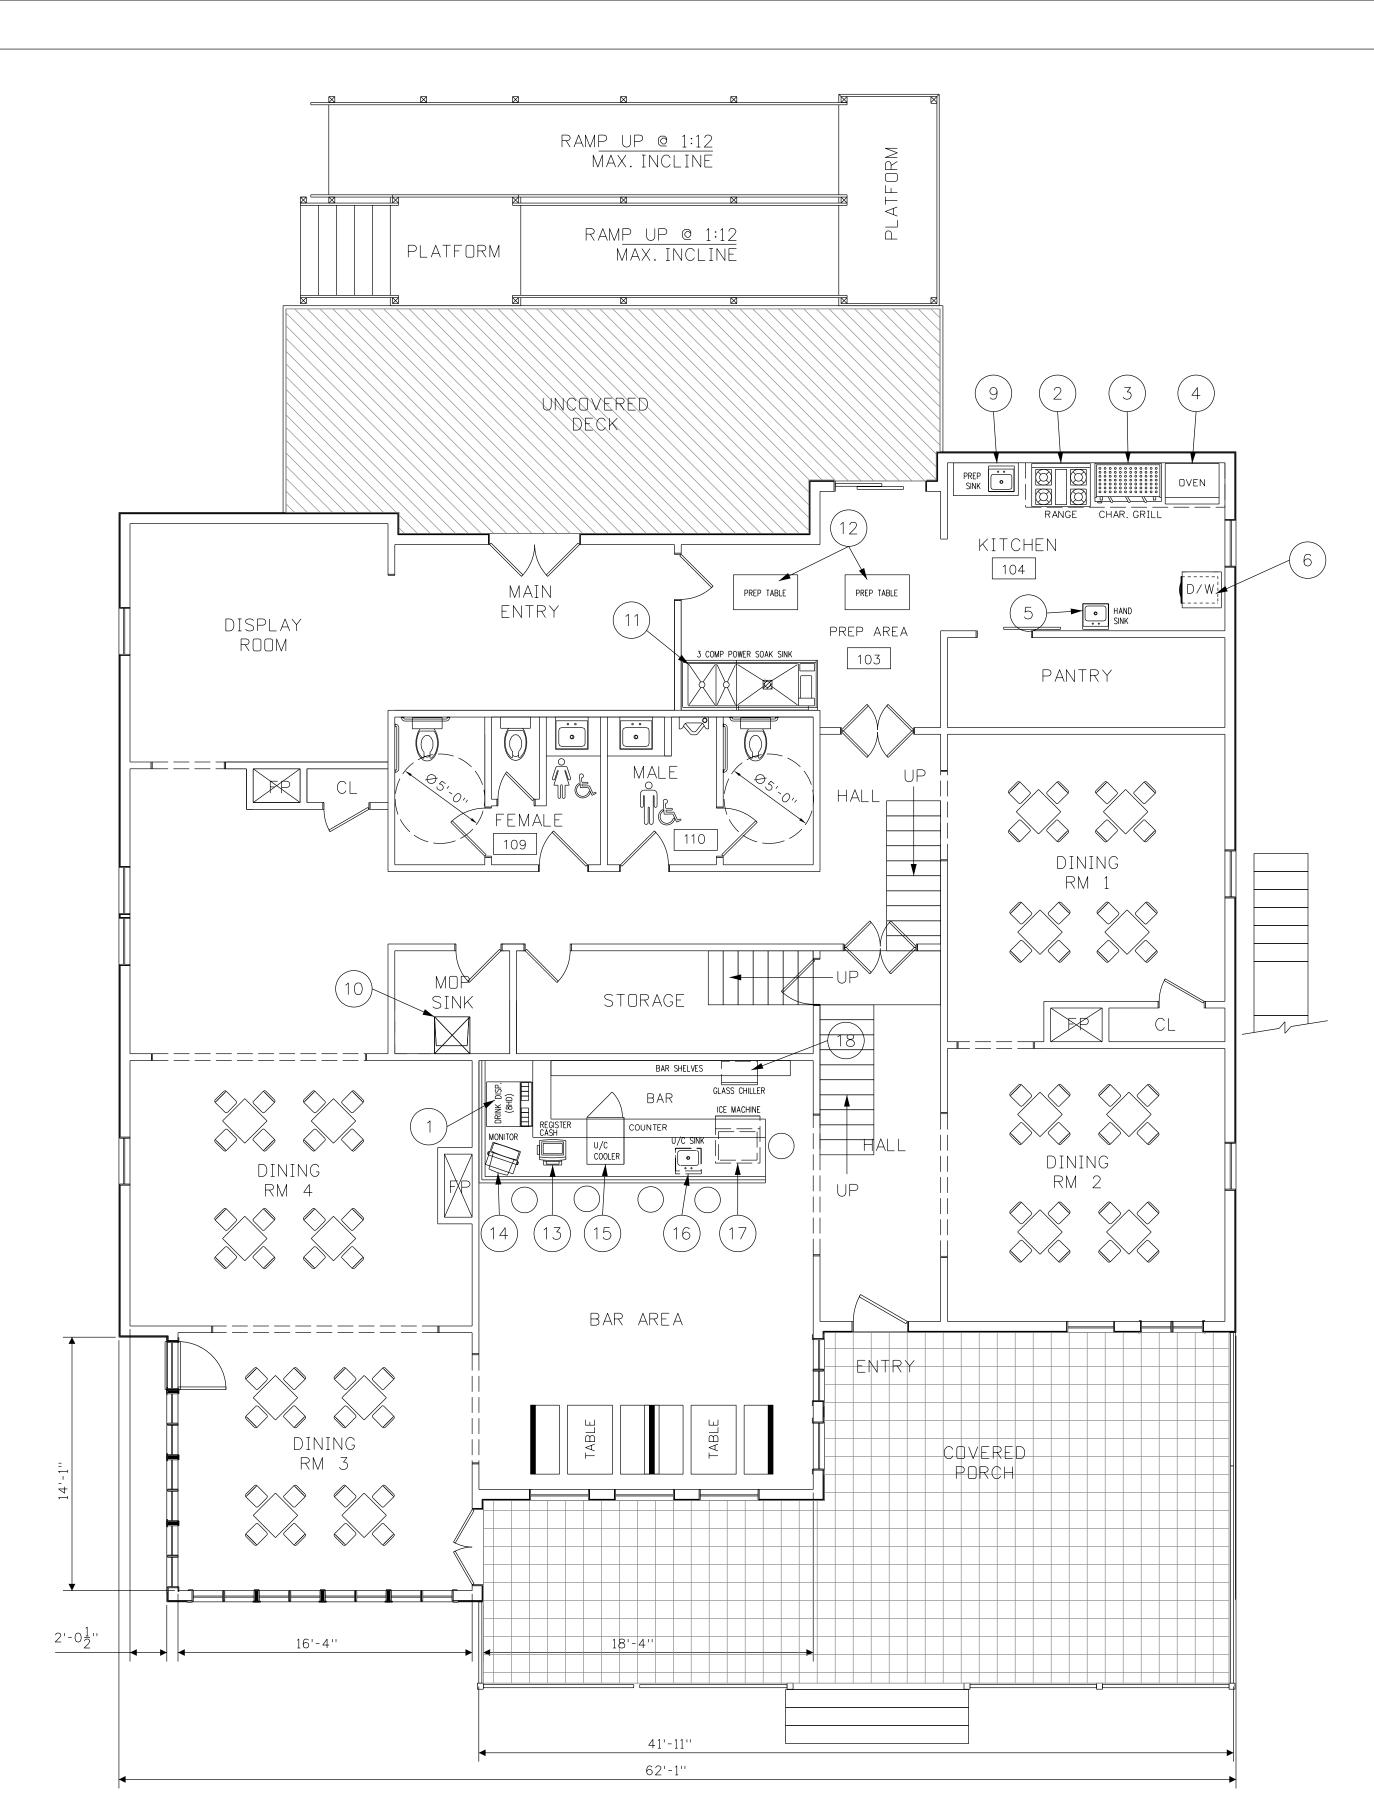

EQUIPMENT PLAN MAIN FL.

3/16" = 1'-0"

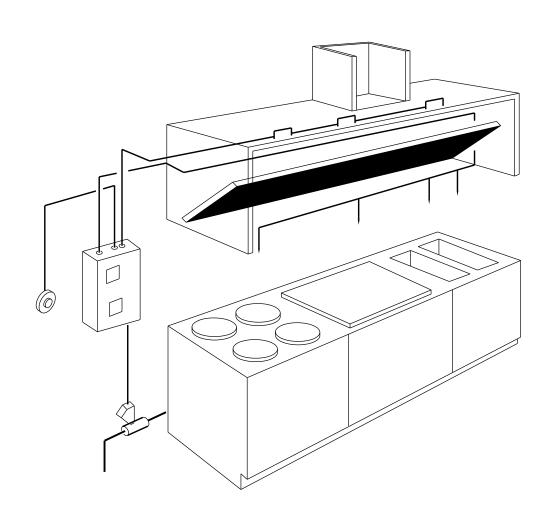

HOOD DETAIL

NOT TO SCALE

- 1. DRINK DISPENSER
- 2. RANGE
- . CHAR GRILL
- 4. OVEN
- 5. HAND SINK
- 6. DISHWASHER
- 7. DOUBLE OPEN FRYER
- 8. GRILL
- 9. PREP SINK
- 10. MOP SINK
- 11. 3 COMPARTMENT SINK
- 2. PREP TABLE
- 3. CASH REGISTER
- 14. MONITOR
- 15. U/C COOLER
- 16. U/C SINK
- 17. ICE MACHINE
- 18. GLASS CHILLER
- 9. HOOD (SEE NOTE 1)

ISPENSER

FOR INFORMATION CONTACT

LOCATION

FOR INFORMATION CONTACT

ALBERT SOLAND

7675 TARA BLVD

JONESBORD, GA 30236

JONESBORD, GA 30236

EQUIPMENT LAYOUT Main floor

REVISIONS

NO DATE

1
2
3

DRAWN BY

RLH

Date 10/25/2022

Scale AS NOTED

DWG No.

 \triangle

NOTE:

1. CONTRACTOR SHALL SUPPLY AND INSTALL AN EXHAUST HOOD WITH VENTILATION, GREASE MANAGEMENT AND FIRE SUPPRESSION SIZED PER MANUFACTURER'S GUIDELINES FOR THE LEVEL OF DUTY. HOOD SHALL COMPLY WITH ALL APPLICABLE CODES INCLUDING NFPA 17A AND NFPA 96.

LICENSED CONTRACTOR TO APPLY FOR AND SECURE ALL REQUIRED PERMITS
BEFORE STARTING WORK. SUBMISSION TO COVER ALL COMPONENTS INCLUDING HOOD,
ALL DUCTWORK, INCLUDING EXHAUST AND SUPPLY AIR, FANS, AND FIRE
EXTINGUISHING EQUIPMENT.

FOR INFORMATION CONTACT	ALBERT SOLANO 7675 TARA BLVD JONESBORO, GA 30236
LOCATION	162 S MAIN STREET Jonesbord, ga 30236

REVISIONS DATE

DRAWN BY RLH

Date 10/25/2022 Scale AS NOTED

DWG No.

LIFE & SAFETY SYMBOLS

EMERGENCY ASSEMBLY AREA

EXIT LIGHT (DIRECTIONAL ARROW AS NEEDED)

BUILDING EXIST / EMERGENCY LIGHT

FACP FIRE ALARM CONTROL PANEL

EXIT BUILDING EXIT ----- PRIMARY EVACUATION ROUTE

---- SECONDARY EVACUATION ROUTE

ACCESSIBLE ROUTE

SD SMOKE DETECTOR

F EMERGENCY STROBE LIGHT UP STAIRWAY F MANUAL FIRE ALARM PULL STATION DOWN STAIRWAY AP ANNUNCIATOR PANEL

PKFE NEW FIRE EXTINGUISHER

F.E. EXISTING FIRE EXTINGUISHER

ROOM#	GROSS AREA SF	NET AREA SF	USE	OCCUPANT LOAD FACTOR (sq ft per person)	OCCUPAN T LOAD	EXIT ACCESS TRAVEL DISTANCE (FT)
DINING ROOM 1	253	220	ASSEMBLY TABLES & CHAIRS	15	15	71
DINING ROOM 2	225	170	ASSEMBLY TABLES & CHAIRS	15	11	50
DINING ROOM 3	224	206	ASSEMBLY TABLES & CHAIRS	15	14	30
DINING ROOM 4	268	252	ASSEMBLY TABLES & CHAIRS	15	17	35
BAR	119	119	ASSEMBLY FIXED SEATS	# OF SEATS	6	58
BAR ROOM	302	302	ASSEMBLY FIXED SEATS	# OF SEATS	8	54
KITCHEN	286		COMMERCIAL KITCHEN	200	2	74
LOBBY / DISPLAY RM	317	126	ASSEMBLY FIXED SEATS + STANDING	5 NET (PLUS FIXED SEATS)	31	64
EVENT ROOM 1	184	184	ASSEMBLY TABLES & CHAIRS	15	12	81
EVENT ROOM 2	216	216	ASSEMBLY TABLES & CHAIRS	15	14	61
EVENT ROOM 3	133	133	ASSEMBLY TABLES & CHAIRS	15	9	81
EVENT ROOM 4	138	138	ASSEMBLY TABLES & CHAIRS	15	9	52
				TOTAL	148	

ALL SOURCES OF AIR LEAKAGE IN THE BUILDING THERMAL ENVELOPE ARE TO BE SEALED, CAULKED, GASKETED, WEATHER STRIPPED OR WRAPPED AS APPROPRIATE WITH MOISTURE VAPOUR-PERMEABLE WRAPPING MATERIAL

TOTAL VERTICAL FENETRATION = 5.4% OF ABOVE-GRADE WALL BUILDING HAS NO SKYLIGHTS

EMITY STANTON CHIPP STANTON			RAMP UP @ 1:12 MAX. INCLINE			
EN R	 	PLATFORM	RAMP_UP_@_1:12→ MAX.INCLINE			
ENT CONTROL CO						
D. S. P. S.		EXIT			2	
FIMALE VALUE FIMALE STANGS	ROOM RO			ITCHEN	PANTRY	
MOR STURAGE		FEMAL	MALE S.	96×80 0PENING	DINING RM 1 (15)	
DINING OPENING OPEN	144×80	MOP	STORAGE			
DINING 14 EXIT DINING 14 EXIT DICK EXIT EXIT DICK EXIT EX	OPENING OPENING DINI	NG	BAR GLASS CHILLER ICE MACHINE ISTER U/C U/C SINK I	48	DINING (11)	
DINING RM 3 14 EXIT DECK COVERED DECK		144×80		6'-81/2'' ENTRY	T	
	UP EXIT		ABLE			
		EXIT			DECK	
INFLOOR $3265 SF$						
					3265 SF	

MAIN FLOOR OCCUPANT LOAD: 108

DRAWN BY RLH

Date 10/25/2022 Scale AS NOTED DWG No.

LIFE & SAFETY SYMBOLS

EMERGENCY ASSEMBLY AREA

F EMERGENCY STROBE LIGHT

BUILDING EXIST / EMERGENCY LIGHT F MANUAL FIRE ALARM PULL STATION

AP ANNUNCIATOR PANEL

DOWN STAIRWAY

FACP FIRE ALARM CONTROL PANEL

----- PRIMARY EVACUATION ROUTE

ACCESSIBLE ROUTE

EXIT LIGHT (DIRECTIONAL ARROW AS NEEDED)

EXIT BUILDING EXIT

PKFE NEW FIRE EXTINGUISHER

---- SECONDARY EVACUATION ROUTE

SMOKE DETECTOR

						EV/IT
ROOM #	GROSS AREA SF	NET AREA SF	USE	OCCUPANT LOAD FACTOR (sq ft per person)	OCCUPAN T LOAD	EXIT ACCESS TRAVEL DISTANCE (FT)
DINING ROOM 1	253	220	ASSEMBLY TABLES & CHAIRS	15	15	71
DINING ROOM 2	225	170	ASSEMBLY TABLES & CHAIRS	15	11	50
DINING ROOM 3	224	206	ASSEMBLY TABLES & CHAIRS	15	14	30
DINING ROOM 4	268	252	ASSEMBLY TABLES & CHAIRS	15	17	35
BAR	119	119	ASSEMBLY FIXED SEATS	# OF SEATS	6	58
BAR ROOM	302	302	ASSEMBLY FIXED SEATS	# OF SEATS	8	54
KITCHEN	286		COMMERCIAL KITCHEN	200	2	74
LOBBY / DISPLAY RM	317	126	ASSEMBLY FIXED SEATS + STANDING	5 NET (PLUS FIXED SEATS)	31	64
EVENT ROOM 1	184	184	ASSEMBLY TABLES & CHAIRS	15	12	81
EVENT ROOM 2	216	216	ASSEMBLY TABLES & CHAIRS	15	14	61
EVENT ROOM 3	133	133	ASSEMBLY TABLES & CHAIRS	15	9	81
EVENT ROOM 4	138	138	ASSEMBLY TABLES & CHAIRS	15	9	52
				TOTAL	148	


ALL SOURCES OF AIR LEAKAGE IN THE BUILDING THERMAL ENVELOPE ARE TO BE SEALED, CAULKED, GASKETED, WEATHER STRIPPED OR WRAPPED AS APPROPRIATE WITH MOISTURE VAPOUR-PERMEABLE WRAPPING MATERIAL

TOTAL VERTICAL FENETRATION = 5.4% OF ABOVE-GRADE WALL BUILDING HAS NO SKYLIGHTS

	RAMP UP @ 1:12 MAX. INCLINE RAMP UP @ 1:12 MAX. INCLINE PLATFORM RAMP UP @ 1:12 MAX. INCLINE	PLATFORM S		
ING BUILDING BELOW	OUTLINE OF EXISTING BUILDING BELO		EXISTING BUILDING BELOW	 STAIRS EGRESS
OUTLINE OF EXISTING	BATH PKFE	OPENING BELOW	FL CL	CAPACITY 146
EVENT ROOM 1 (12)		HALL EVENT ROOM 3 9	EVENT ROOM 4	36" EXIST DOOR CLEAR WIDTH - 34" EGRESS CAP 150 48" CORRIDOR EGRESS CAP 240
			1467 SF	

3/16" = 1'-0"

FIRST FLOOR OCCUPANT LOAD: 71

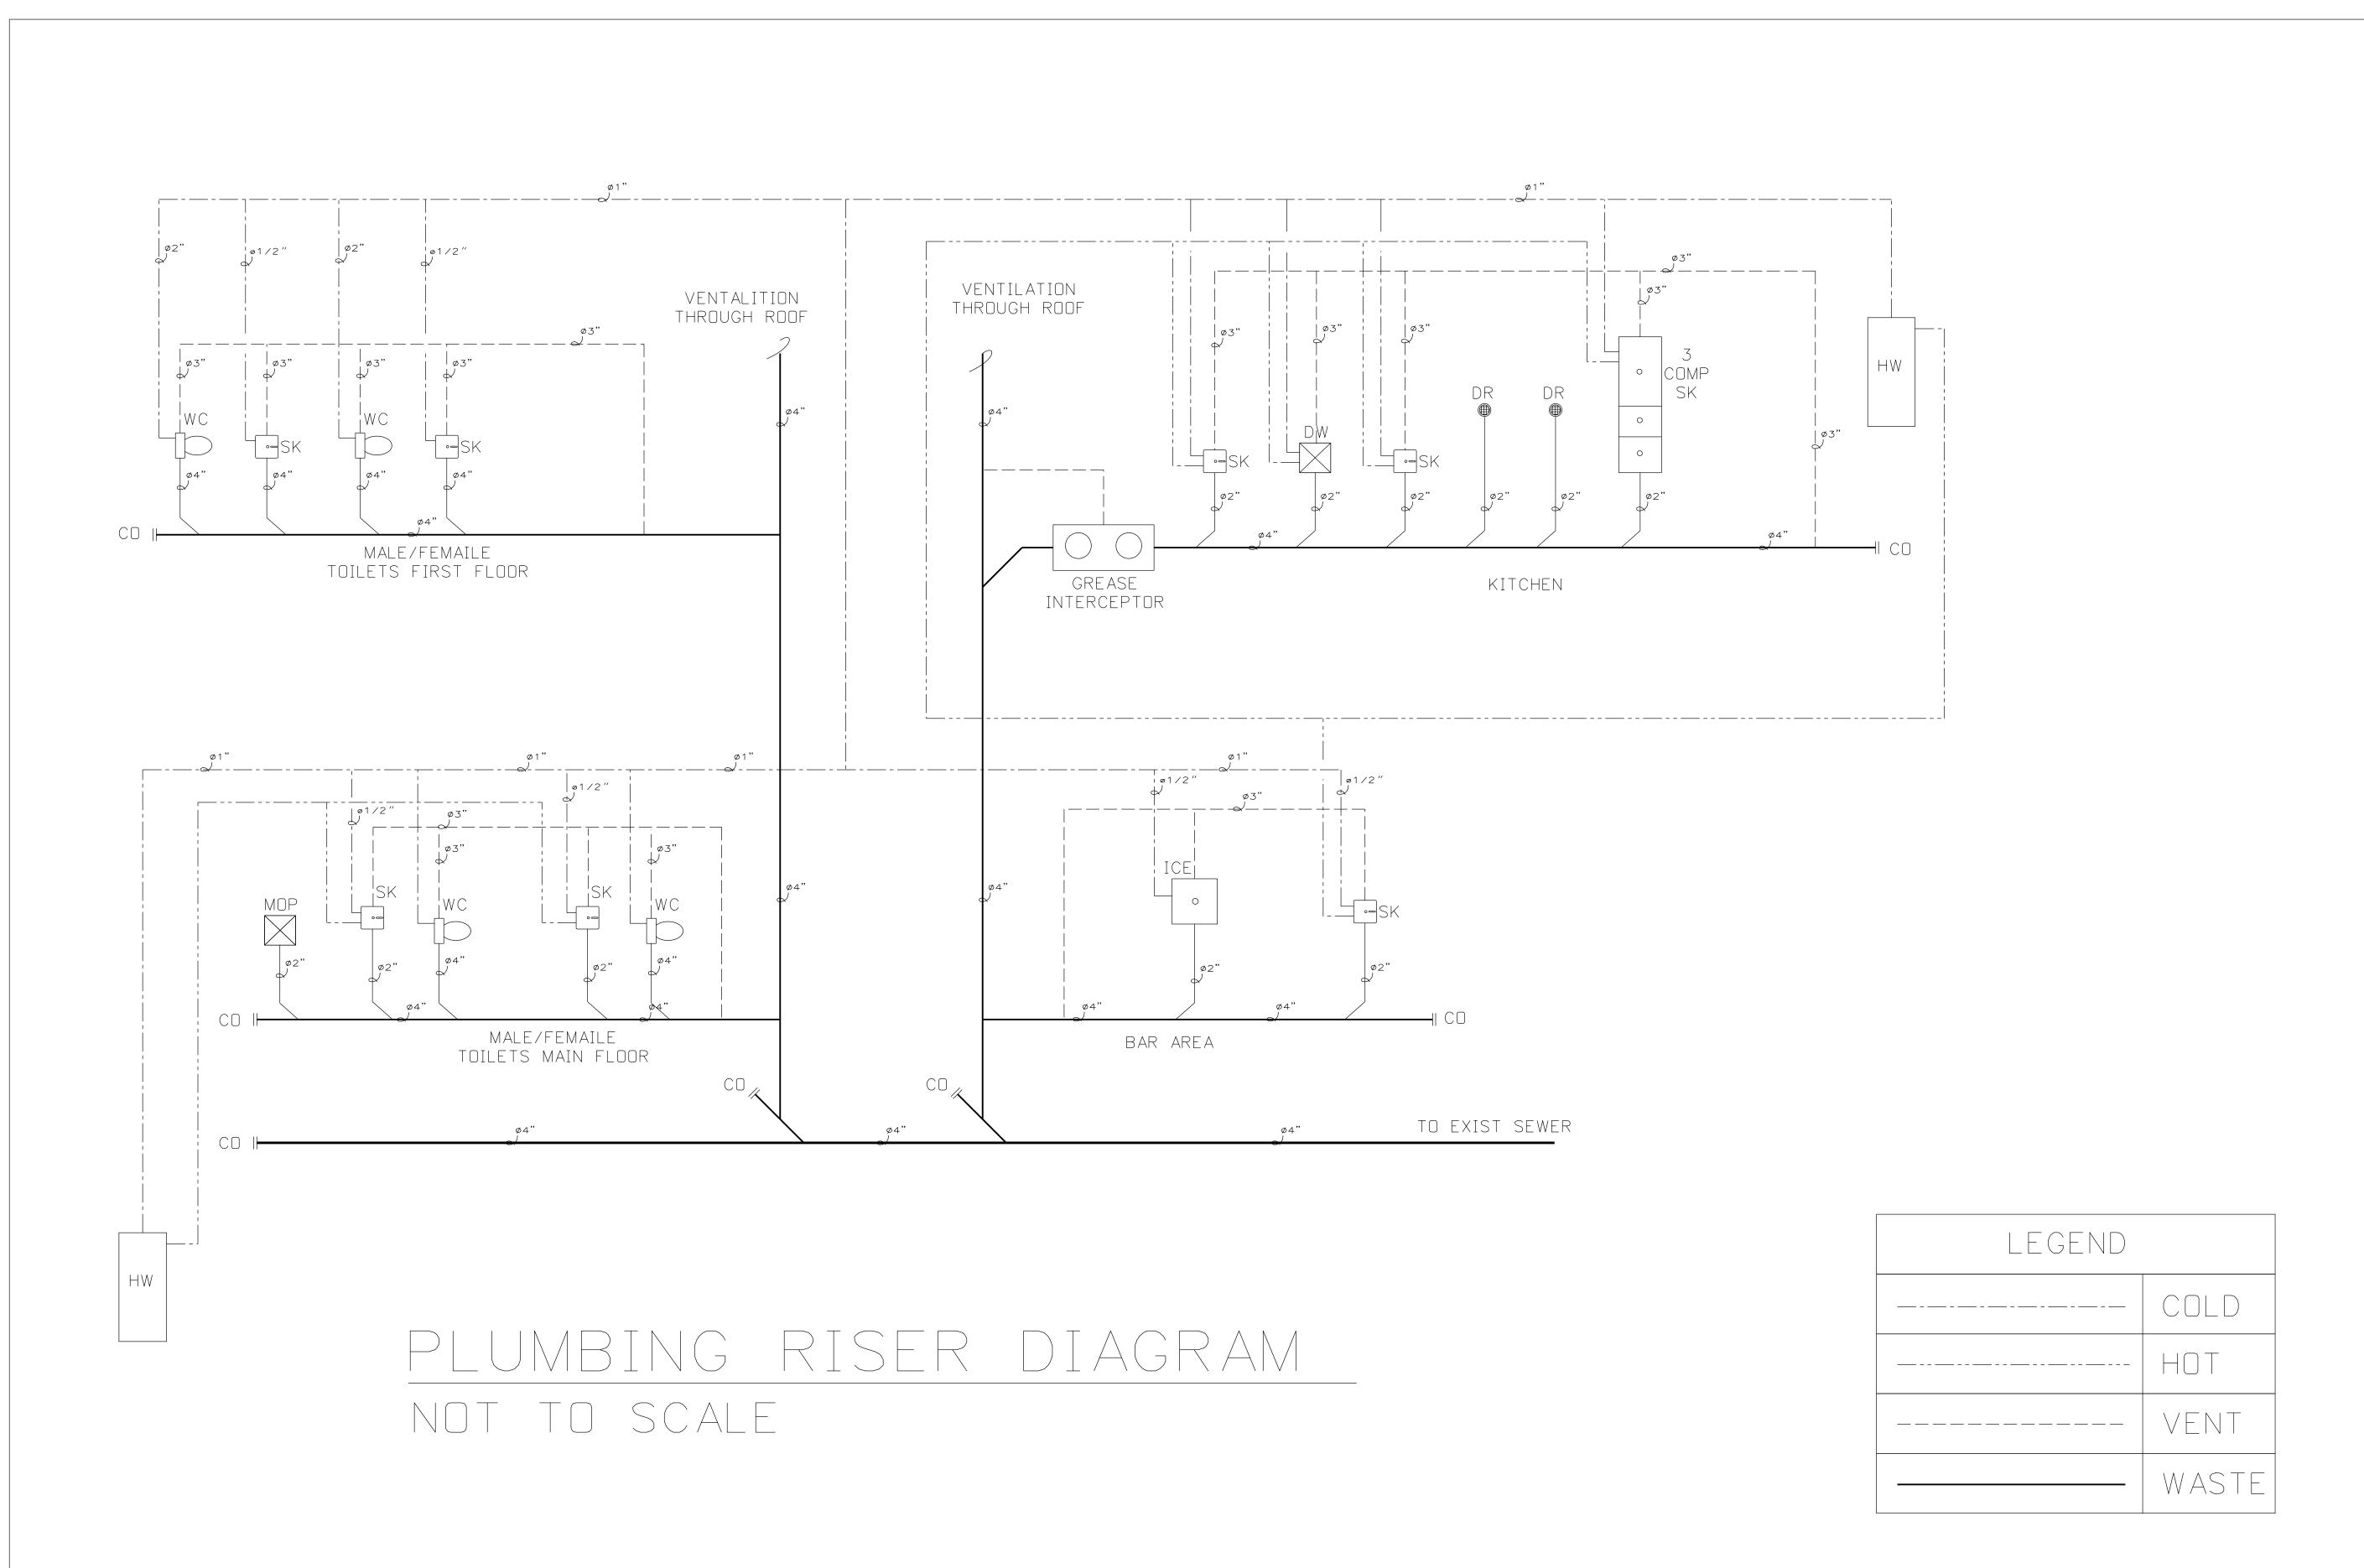

PLUMBING RISER DIAGRAM REVISIONS DATE DRAWN BY RLH Date 10/25/2022 Scale AS NOTED DWG No.

SOUTHERN PINE SPAN TABLES

1	SPANS	GIVE	N IN	FEET	AND	INCHES
	TNIC	יוחב י	TO IN	ICIDE		LVDINCC

TABLE 2 FLOOR JOISTS - 40 PSF LIVE LOAD, 10 PSF DEAD LOAD, 360 DEFLECTION											
Size	Spacing	Grade									
inches	inches on center		Visually	Graded		Machine	Stress Rat	ed (MSR)	Machine E	Ivaluated Lu	mber (MEL)
		DSS	No.1	No.2	No.3	2400f - 2.0E	1650f - 1.5E	1500f - 1.6E	M-14 (1800-1.7)	M-29 (1550-1.7)	M-12 (1600-1.6)
	12.0	11 - 4	10 - 9	10 - 3	8 - 2	11 - 7	10 - 6	10 - 9	10 - 11	10 - 11	10 - 9
2 × 6	16.0	10 - 4	9 - 9	9 - 4	7 - 1	10 - 6	9 - 6	9 - 9	9 - 11	9 - 11	9 - 9
2 x 0	19.2	9 - 8	9 - 2	8 - 6	6 - 5	9 - 10	9 - 0	9 - 2	9 - 4	9 - 4	9 - 2
	24.0	9 - 0	8 - 6	7 - 7	5 - 9	9 - 2	8 - 4	8 - 6	8 - 8	8 - 8	8 - 6
	12.0	15 - 0	14 - 2	13 - 6	10 - 3	15 - 3	13 - 10	14 - 2	14 - 5	14 - 5	14 - 2
2 × 8	16.0	13 - 7	12 - 10	11 - 10	8 - 11	13 - 10	12 - 7	12 - 10	13 - 1	13 - 1	12 - 10
2 × 0	19.2	12 - 10	12 - 1	10 - 10	8 - 2	13 - 0	11 - 10	12 - 1	12 - 4	12 - 4	12 - 1
	24.0	11 - 11	11 - 3	9 - 8	7 - 3	12 - 1	11 - 0	11 - 3	11 - 5	11 - 5	11 - 3
	12.0	19 - 1	18 - 0	16 - 2	12 - 6	19 - 5	17 - 8	18 - 0	18 - 5	18 - 5	18 - 0
2 × 10	16.0	17 - 4	16 - 1	14 - 0	10 - 10	17 - 8	16 - 0	16 - 5	16 - 9	16 - 9	16 - 5
2 × 10	19.2	16 - 4	14 - 8	12 - 10	9 - 10	16 - 7	15 - 1	15 - 5	15 - 9	15 - 9	15 - 5
	24.0	15 - 2	13 - 1	11 - 5	8 - 10	15 - 5	14 - 0	14 - 4	14 - 7	14 - 7	14 - 4
	12.0	23 - 3	21 - 11	19 - 1	14 - 9	23 - 7	21 - 6	21 - 11	22 - 5	22 - 5	21 - 11
2 × 12	16.0	21 - 1	19 - 1	16 - 6	12 - 10	21 - 6	19 - 6	19 - 11	20 - 4	20 - 4	19 - 11
2 ^ 12	19.2	19 - 10	17 - 5	15 - 1	11 - 8	20 - 2	18 - 4	18 - 9	19 - 2	19 - 2	18 - 9
	24.0	18 - 5	15 - 7	13 - 6	10 - 5	18 - 9	17 - 0	17 - 5	17 - 9	17 - 9	17 - 5

ITEM	DESCRIPTION
STUDS: (2X4	SOUTHERN PINE STUD GRADE
POST BEAMS AND HEADERS	SOUTHERN PINE GRADE 1
ALL OTHER HORIZONTAL	SOUTHERN PINE GRADE 2
ALL OTHER VERTICAL	SOUTHERN PINE GRADE 2
PLYWOOD:	
STRUCTURAL SHEATHING	GRADE MARKED STRUCTURAL 1
PLYCLIPS	PSC'S BY SIMPSON OR EQUAL
LAG BOLTS	ANSI/ASME B18.2.6-2019 FASTENERS FOR USE IN STRUCTURAL APPLICATIONS
NAILS	ASTM F-1667-21 STND SPEC FOR DRIVEN FASTENERS
SCREWS	ASME 818.61 / ASTM A502
JDIST HANGERS	SIMPSON OR EQUAL
CONNECTORS	SIMPSON OR EQUAL (USE GALVANIZED AT EXTERIOR LOCATIONS)

SOUTHERN PINE SPAN TABLES

MAXIMUM SPANS GIVEN IN FEET AND INCHES INSIDE TO INSIDE OF BEARINGS

		TABLE	42 RAFTER	S - 20 PSF	LIVE LOAD	D, 15 PSFDE	AD LOAD, 24	-O DEFLECT	ION, CD = 1	.25		
SIZE	SPACING	GRADE										
			VISUALLY GRADED				MACHINE STRESS RATED (MSR)			MACHINE EVALUATED LUMBER (MEL		
INCHES	INCHES ON CENTER	DSS	No.1	No.2	No.3	2400f - 2.0E	1650f - 1.5E	1500f - 1.6E	M-14 (1800-1.7)	M-29 (1550-1.7)	M-12 (160	
	12.0	16 - 4	15 - 6	14 - 5	10 - 11	16 - 8	15 - 2	15 - 6	15 - 9	15 - 9	15 -	
2 × 6	16.0	14 - 11	14 - 1	12 - 6	9 - 5	15 - 2	13 - 9	14 - 1	14 - 4	14 - 4	14 -	
2 x 0	19.2	14 - 0	13 - 3	11 - 5	8 - 8	14 - 3	12 - 11	13 - 3	13 - 6	13 - 6	13 -	
	24.0	13 - 0	11 - 10	10 - 2	7 - 9	13 - 3	12 - 0	12 - 3	12 - 6	12 - 6	12 -	
	12.0	21 - 7	20 - 5	18 - 3	13 - 9	21 - 11	19 - 11	20 - 5	20 - 10	20 - 10	20 -	
2 x 8	16.0	19 - 7	18 - 4	15 - 10	11 - 11	19 - 11	18 - 2	18 - 6	18 - 11	18 - 11	18 -	
2 x 0	19.2	18 - 5	16 - 9	14 - 5	10 - 10	18 - 9	17 - 1	17 - 5	17 - 9	17 - 9	17 -	
	24.0	17 - 2	15 - 0	12 - 11	9 - 9	17 - 5	15 - 10	16 - 2	16 - 6	16 - 6	16 -	
	12.0	26 - 0*	24 - 10	21 - 8	16 - 8	26 - 0*	25 - 5	26 - 0	26 - 0*	26 - 0*	26 -	
2 x 10	16.0	25 - 0	21 - 6	18 - 9	14 - 5	25 - 5	23 - 2	23 - 8	24 - 1	24 - 1	23 -	
Z X 1U	19.2	23 - 7	19 - 7	17 - 1	13 - 2	23 - 11	21 - 9	22 - 3	22 - 8	22 - 8	22 -	
	24.0	21 - 10	17 - 6	15 - 4	11 - 10	22 - 3	20 - 2	20 - 8	21 - 1	21 - 1	20 -	
	12.0	26 - 0*	26 - 0*	25 - 6	19 - 9	26 - 0*	26 - 0*	26 - 0*	26 - 0*	26 - 0*	26 -	
2 × 12	16.0	26 - 0*	25 - 6	22 - 1	17 - 1	26 - 0*	26 - 0*	26 - 0*	26 - 0*	26 - 0*	26 -	
	19.2	26 - 0*	23 - 3	20 - 2	15 - 7	26 - 0*	26 - 0*	26 - 0*	26 - 0*	26 - 0*	26 -	
	24.0	26 - 0*	20 - 10	18 - 0	14 - 0	26 - 0*	24 - 7	25 - 1	25 - 7	25 - 7	25 -	

CEILING JOISTS - 20 PSF LIVE LOAD, 10 PSF DEAD LOAD, 240 DEFLECTION (MAX SPANS IN FEET AND INCHES)

SIZE	SPACING	GRADE										
INCHES	INCHES ON CENTER	VISUALLY GRADED				MACHINE STRESS RATED (MSR)			MACHINE EVALUATED LUMBER (MEL)			
		DSS	No.1	No.2	No.3	2400f - 2.0E	1650f - 1.5E	1500f - 1.6E	M-14 (1800-1.7)	M-29 (1550-1.7)	M-12 (1600-1.6)	
2 x 4	12.0	10 - 5	9 - 10	9 - 3	7 - 2	10 - 7	9 - 8	9 - 10	10 - 0	10 - 0	9 - 10	
	16.0	9 - 6	8 - 11	8 - 0	6 - 2	9 - 8	8 - 9	8 - 11	9 - 1	9 - 1	8 - 11	
	19.2	8 - 11	8 - 5	7 - 4	5 - 8	9 - 1	8 - 3	8 - 5	8 - 7	8 - 7	8 - 5	
	24.0	8 - 3	7 - 8	6 - 7	5 - 1	8 - 5	7 - 8	7 - 8	8 - 0	7 - 9	7 - 10	
2 x 6	12.0	16 - 4	15 - 6	13 - 11	10 - 7	16 - 8	15 - 2	15 - 6	15 - 9	15 - 9	15 - 6	
	16.0	14 - 11	14 - 0	12 - 0	9 - 2	15 - 2	13 - 9	14 - 1	14 - 4	14 - 4	14 - 1	
	19.2	14 - 0	12 - 9	11 - 0	8 - 4	14 - 3	12 - 11	13 - 3	13 - 6	13 - 6	13 - 3	
	24.0	13 - 0	11 - 5	9 - 10	7 - 5	13 - 3	12 - 0	12 - 0	12 - 6	12 - 3	12 - 3	
2 x 8	12.0	21 - 7	20 - 5	17 - 7	13 - 3	21 - 11	19 - 11	20 - 5	20 - 10	20 - 10	20 - 5	
	16.0	19 - 7	17 - 9	15 - 3	11 - 6	19 - 11	18 - 2	18 - 6	18 - 11	18 - 11	18 - 6	
	19.2	18 - 5	16 - 2	13 - 11	10 - 6	18 - 9	17 - 1	17 - 5	17 - 9	17 - 9	17 - 5	
	24.0	17 - 2	14 - 6	12 - 6	9 - 5	17 - 5	15 - 10	15 - 10	16 - 6	16 - 2	16 - 2	
2 x 10	12.0	26 - 0	23 - 11	20 - 11	16 - 1	26 - 0	25 - 5	26 - 0	26 - 0	26 - 0	26 - 0	
	16.0	25 - 0	20 - 9	18 - 1	13 - 11	25 - 5	23 - 2	23 - 8	24 - 1	24 - 1	23 - 8	
	19.2	23 - 7	18 - 11	16 - 6	12 - 9	23 - 11	21 - 9	22 - 3	22 - 8	22 - 8	22 - 3	
	24.0	21 - 10	16 - 11	14 - 9	11 - 5	22 - 3	20 - 2	20 - 3	21 - 1	20 - 7	20 - 8	

FRAMING NOTES:

A. HORIZONTAL SHEATHING JOINTS SHALL NOT OCCUR AT THE FLOOR LINE, NOR SHALL VERTICAL OR HORIZONTAL JOINTS ALIGN WITH SIDES OF OPENINGS IN THE EXTERIOR WALLS. AT MULTI-STORY WALLS, SHEATHING PANELS SHALL OVERLAP THE FLOOR LINE BY A MINIMUM OF 12 INCHES AND EXTEND A MINIMUM OF 12 INCHES BELOW THE BOTTOM OF THE FLOOR STRUCTURE.

B.- INSTALL SIMPSON STRONG-TIE HTT5 TENSION TIE ON BOTH SIDES OF EACH GARAGE DOORWAY. - INSTALL SIMPSON STRONG-TIE CSHP 18 STRAP ON ALL GARAGE DOOR HEADER BEAMS - ALL WOOD IN CONTACT WITH CONCRETE OR CMU TO BE PRESSURE TREATED.


C. GARAGE DOOR HEADERS SHALL EXTEND PAST THE DOOR JAMB FRAMING A MINIMUM OF 16 INCHES, OR THE FULL WIDTH OF THE BRACED WALL PANEL ADJACENT TO THE DOOR IF THAT IS LESS THAN 16 INCHES.


D. EACH ROOF RAFTER SHALL BE TIED DOWN TO BOTH DOUBLE TOP PLATES WITH STRAPS OF SUFFICIENT LENGTH TO SPAN FROM THE ROOF RAFTER, ACROSS THE BAND AT THE CEILING JOISTS, AND EXTENDING, AT A MINIMUM, TO THE BOTTOM OF THE LOWER PLATE.

E. PLATE WASHERS THAT ARE A MINIMUM OF 0.229" X 3"x3" SHALL BE PROVIDED FOR ALL ANCHOR BOLTS, BETWEEN THE SILL PLATE AND THE NUT



FOR INFORMATION CONTACT	ALBERT SOLANO 7675 TARA BLVD Jonesboro, ga 30236					
LOCATION	162 S MAIN STREET Jonesbord, ga 30236					
SHEET TITLE	SPAN TABLES & FRAMING NOTES					
5	REVISIONS					
NO 1	DATE					
2						
3						
	DRAWN BY					
RLH						
Dat						
Sca						
	DWG No.					
	$\triangle 1 \cap \square$					

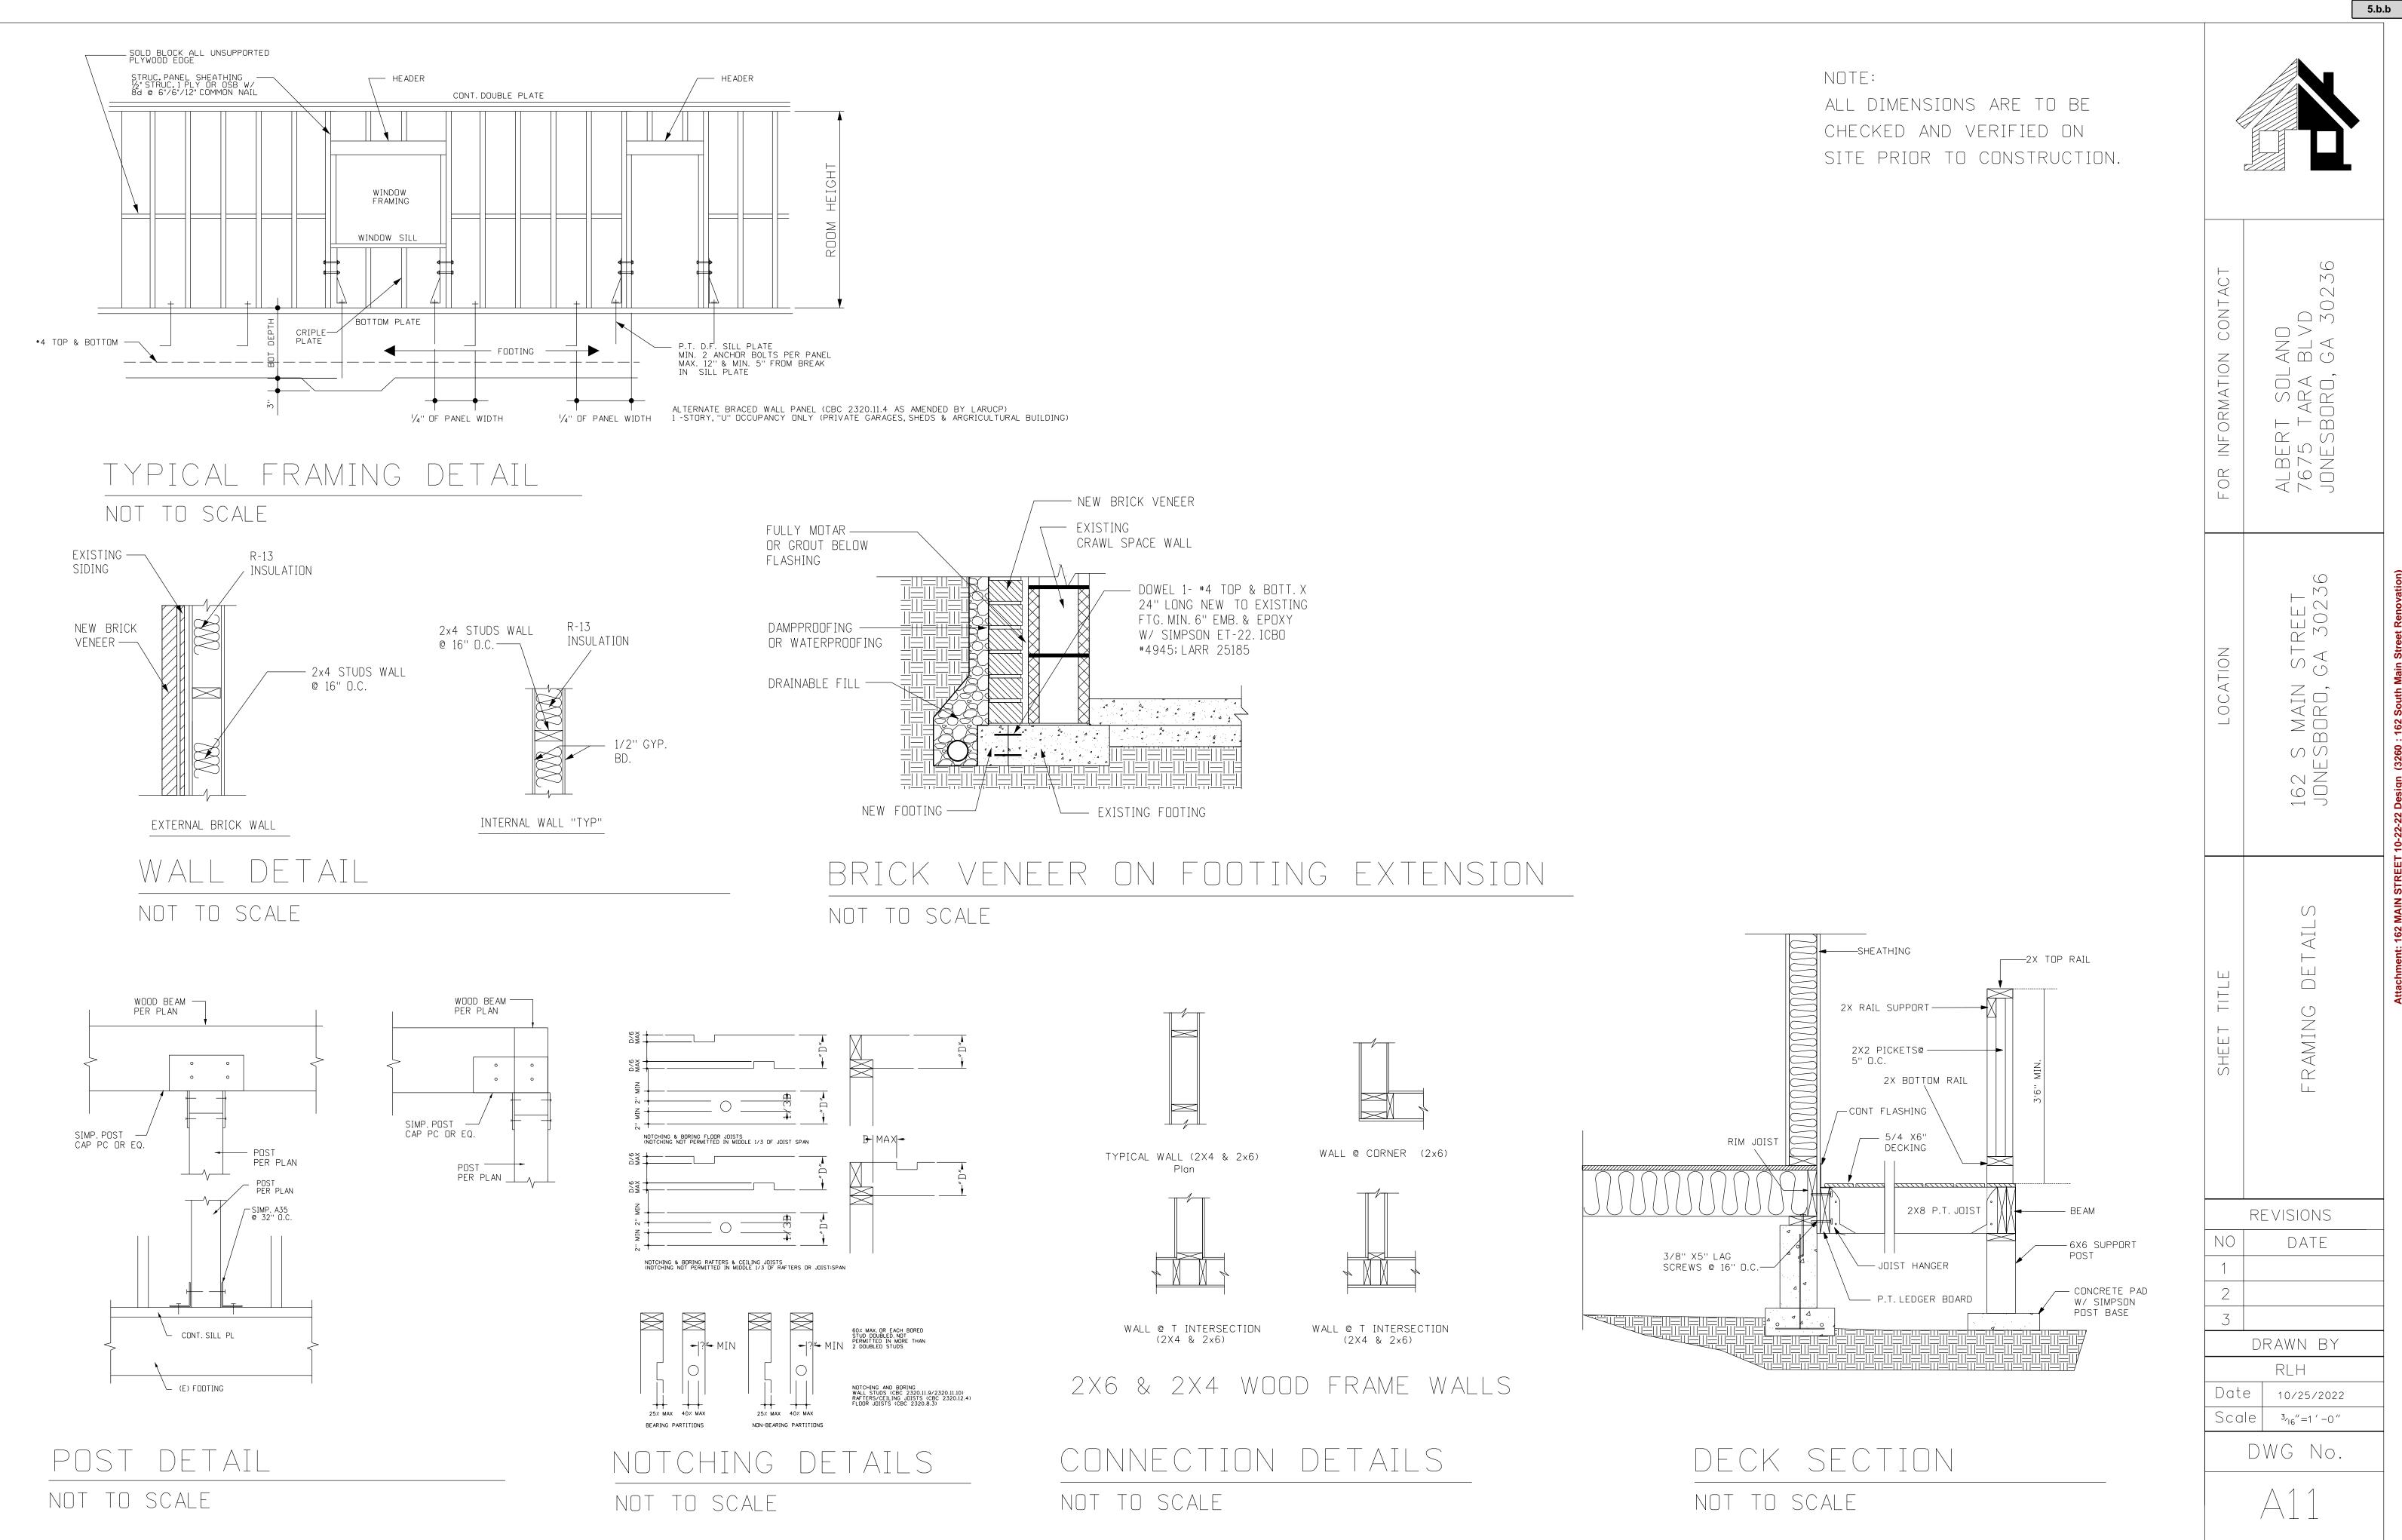

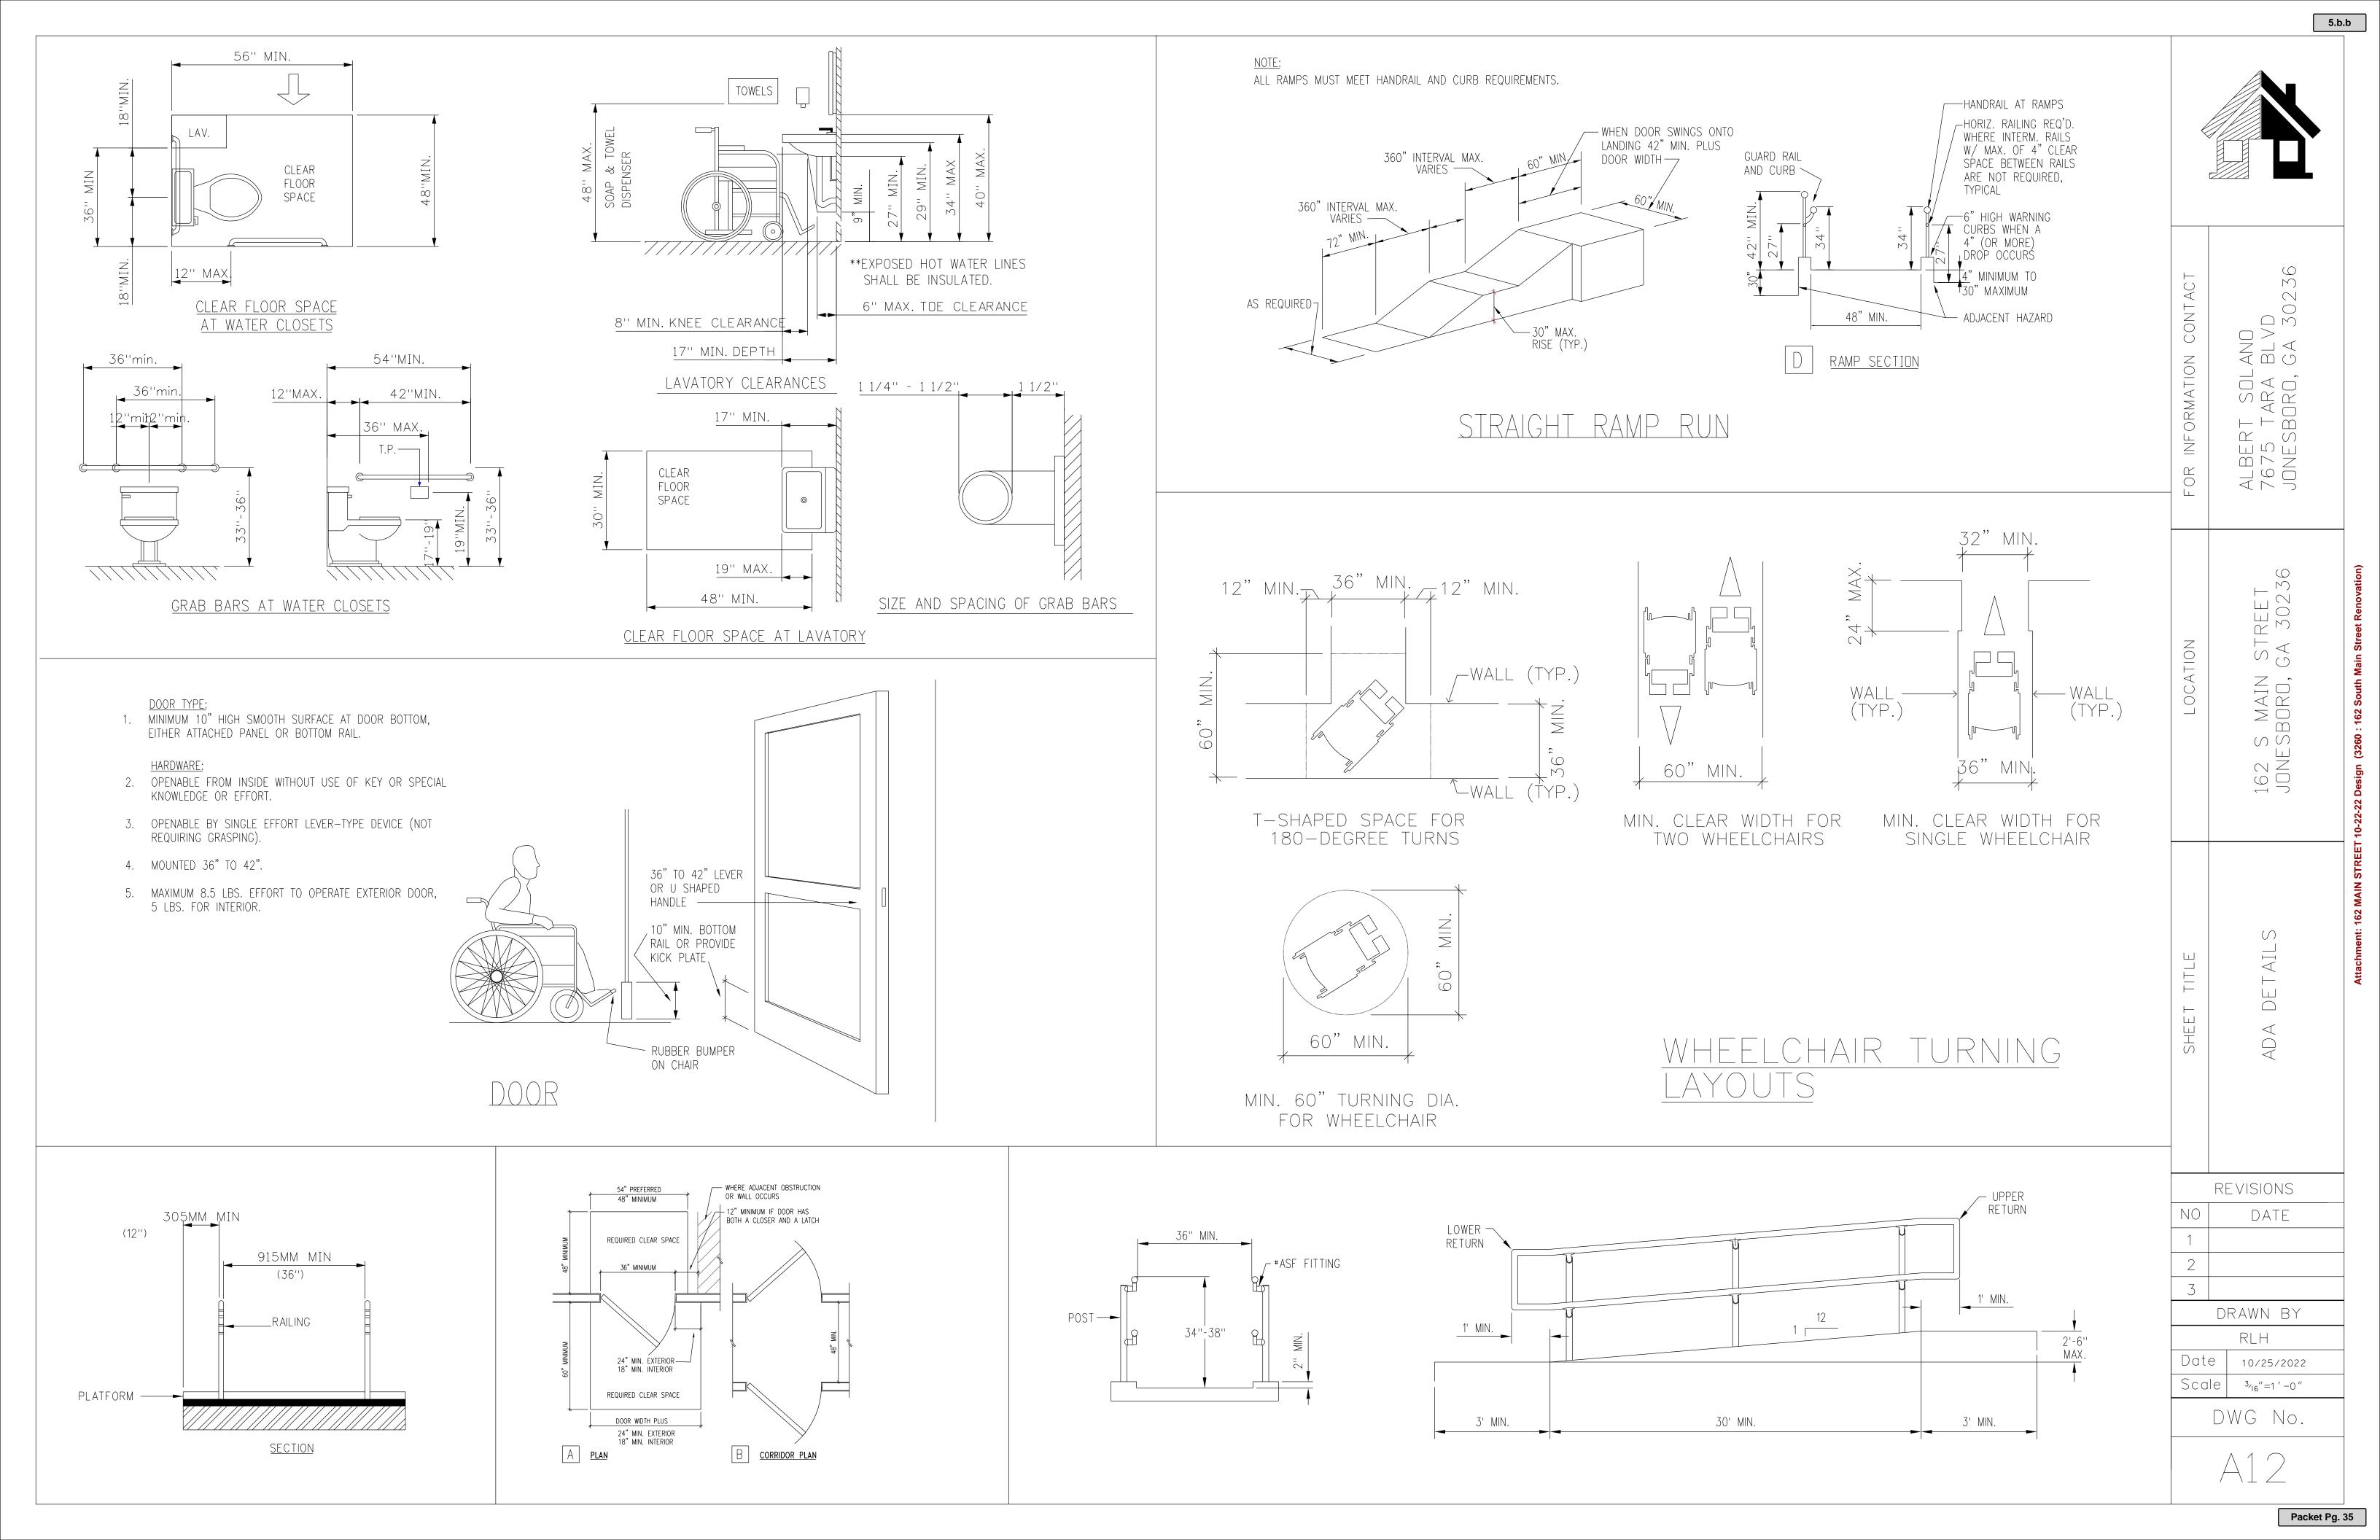

LOCATION: 162 S MAIN STREET JONESBORD, GA 30236

GENERAL
ALL WORK PERFORMED BY THE CONTRACTOR SHALL CONFORM TO THE
REQUIREMENTS OF MUNICIPAL, LOCAL OR FEDERAL AND STATE LAWS AS
WELL AS ANY OTHER GOVERNING REQUIREMENTS, WHETHER OR NOT
SPECIFIED ON THE DRAWINGS.

WHERE THE CONTRACT NOTES OR DRAWINGS CALL FOR ANY WORK OF A MORE STRINGENT NATURE THAN THAT REQUIRED BY THE BUILDING CODE OR ANY OTHER DEPARTMENT HAVING JURISDICTION OVER THE WORK, THE WORK OF THE MOST STRINGENT NATURE CALLED FOR BY THE CONTRACT, CONSTRUCTION NOTES, OR DRAWINGS SHALL BE FURNISHED IN ALL CASES.

THE CONTRACTOR SHALL OBTAIN AND PAY FOR ALL LEGALLY REQUIRED APPROVALS AND PERMITS NECESSARY FOR THE EXECUTION AND COMPLETION OF HIS WORK. FORWARD COPIES OF EXECUTED PERMITS TO OWNER.

ALL DRAWINGS AND ALL CONSTRUCTION NOTES ARE COMPLEMENTARY, AND WHAT IS CALLED FOR BY EITHER WILL BE BINDING AS IF CALLED FOR BY ALL. ANY WORK SHOWN OR REFERRED TO ON ANY ONE SET OF DRAWINGS SHALL BE PROVIDED AS THOUGH SHOWN ON ALL RELATED DRAWINGS.

THE CONTRACTOR IS WHOLLY RESPONSIBLE FOR THE COORDINATION AND SCHEDULING OF THE WORK OF ALL SUBCONTRACTORS CRAFTSMEN AND TRADESMEN REQUIRED TO COMPLETE THE JOB.

THE CONTRACTOR SHALL NOTIFY OWNER IMMEDIATELY IF HE CANNOT COMPLY WITH ALL REQUIREMENTS CALLED FOR ON THESE DRAWINGS.

THE CONTRACTOR SHALL NOTIFY OWNER IMMEDIATELY OF ANY DISCREPANCIES OR OMISSIONS BETWEEN THE DRAWINGS, THESE NOTES AND SPECIFICATIONS, AND FIELD CONDITIONS, AND REQUEST CLARIFICATION BEFORE COMMENCING ANY WORK.

CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS AND CONDITIONS AT JOB SITE RELATING TO THE WORK OF ALL TRADES. NO ALLOWANCE SHALL BE MADE FOR ANY EXTRA EXPENSE OR EXTENSION OF TIME DUE TO CONTRACTOR'S FAILURE OR NEGLIGENCE IN COMPLETELY EXAMINING

COSTS DUE TO DEFECTIVE AND/OR ILL-TIMED WORK AS A RESULT OF, BUT NOT LIMITED TO, INFERIOR WORKMANSHIP OR MATERIALS AND/OR IMPROPER SCHEDULING OR DELINQUENT ORDERING SHALL BE BORNE BY THE CONTRACTOR.

DUMPSTERS OR ANY ONSITE DISPOSAL EQUIPMENT MAY NOT BE LOCATED ON THE STREET.

THE CONTRACTOR SHALL REMOVE ALL RUBBISH AND WASTE MATERIALS FROM HIS AND HIS SUBCONTRACTOR'S WORK AND DISPOSE OF THESE AT APPROPRIATE WASTE MANAGEMENT FACILITIES AT HIS COST.

THE CONTRACTOR SHALL EXERCISE STRICT DUST CONTAINMENT AND DUST CONTROL TO PREVENT DIRT OR DUST FROM LEAVING THE JOBSITE

AND TO MINIMIZE CONTAMINATION OF DUCTS AND AIR HANDLING EQUIPMENT.

SHOULD THE CONTRACTOR DAMAGE ANY NEW OR EXISTING CONSTRUCTION,

STRUCTURE, OR EQUIPMENT HE SHALL REPAIR OR REPLACE THESE AT HIS

COST TO THE SATISFACTION OF AND AT NO COST TO THE OWNER.

THE CONTRACTOR SHALL PROVIDE ALL NECESSARY PROTECTION FOR HIS WORK AND THE PREMISES UNTIL COMPLETION OF CONTRACTED WORK.

THESE DRAWINGS, NOTES, AND SPECIFICATIONS CONVEY THE DESIGN INTENT. THE CONTRACTOR SHALL USE THE HIGHEST POSSIBLE QUALITY OF WORKMANSHIP, NEW MATERIAL, AND EQUIPMENT IN PERFORMING THE WORK.

THE CONTRACTOR SHALL MAINTAIN A CURRENT AND COMPLETE SET OF CONSTRUCTION PLANS ON SITE FOR USE OF ALL HIS SUBCONTRACTORS AND TRADESMEN AND SHALL BE RESPONSIBLE FOR COORDINATING THEIR WORK.

THE CONTRACTOR SHALL COOPERATE WITH THE OWNER IN SCHEDULING AND RESOLVING SCHEDULE AND OTHER CONFLICTS WITH OTHER CONTRACTORS HIRED BY THE OWNER TO PERFORM OTHER WORK AT THE SITE.

THE CONTRACTOR SHALL AS NEEDED ADJUST OR REFURBISH EXISTING MANUFACTURED ITEMS NOT BEING REMOVED AND TIGHTEN ANY LOOSE ITEMS SUCH AS EXIT SIGNS, ALARMS, FIRE EXTINGUISHER CASES, SPEAKERS, MOLDINGS AND DOOR HARDWARE.

CONTRACTOR SHALL ACQUIRE INSURANCE AND BONDING AS DIRECTED TO THE SATISFACTION OF THE OWNER AND PROVIDE PROOF OF SUCH TO THE OWNER.

THE CONTRACTOR SHALL VERIFY SIZE, LOCATION, ELECTRICAL REQUIREMENTS AND CHARACTERISTICS OF ALL WORK AND/OR EQUIPMENT SUPPLIED BY THE OWNER OR OTHERS PRIOR TO THE START OF RELATED WORK WITH THE MANUFACTURER OR SUPPLIER.

FOUNDATION PLAN SHOWS THE DESIGNED SUPPORT FOR THE PROPOSED MODIFIED BUILDING. WHERE CONTRACTOR PROPOSES TO USE EXISTING FOUNDATIONS, CONTRACTOR SHALL CONDUCT ONSITE INVESTIGATIONS AND MEASUREMENTS TO CONFIRM THAT THEY ARE EQUIVALENT OR BETTER THAN SHOWN.

THE OWNER MAY ORDER EXTRA WORK WITHOUT INVALIDATING THE CONTRACT. THE CONTRACTOR SHALL BE PAID EXTRA FOR SUCH WORK AT NEGOTIATED PRICES AND AGREED UPON EXTRA TIME TO COMPLETE IF NECESSARY.

THE CONTRACTOR IS RESPONSIBLE FOR PAYING ALL DELIVERY TO SITE AND UNLOADING CHARGES FOR ALL MATERIAL AND EQUIPMENT NECESSARY FOR AND / OR TO BE INCORPORATED INTO THE WORK.

TIME IS OF THE ESSENCE IN THE CONTRACT AND CONTRACTOR SHALL SUBMIT A DETAILED SCHEDULE OF WORK THROUGH COMPLETION.

EXCEPT WHERE OTHERWISE INDICATED, DIMENSIONS ARE FROM FACE OF FINISH TO FACE OF FINISH. ALL MATERIALS AND WORKMANSHIP SHALL BE GUARANTEED FOR A PERIOD OF ONE YEAR AFTER SUBSTANTIAL COMPLETION OF WORK.

IN SOUND RATED ROOMS, ALL WALL AND FLOOR PENETRATIONS FOR PIPES, DUCTS AND OUTLETS SHALL BE SEALED WITH AN ACOUSTICAL SEALANT AND CONCEALED OR RECESSED FIXTURES SHALL BE COVERED OR BACKED WITH A SOUND ATTENUATION BLANKET.

THE CONTRACTOR SHALL PROVIDE BLOCKING, BACKING, FRAMING HANGERS, OR OTHER SUPPORT FOR ALL FIXTURES, EQUIPMENT, CABINETRY, FURNISHINGS, AND ALL OTHER ITEMS AS REQUIRED.

DOOR OPENINGS IN GYPSUM BOARD PARTITIONS NOT DIMENSIONED ARE LOCATED IN CENTER OF ROOM OR WITHIN 4" OF ADJOINING PARTITION

ALL ITEMS ARE NEW UNLESS NOTED OTHERWISE.

CONTRACTOR SHALL ENSURE THAT INSTALLATION METHODS CONFORM TO ALL APPLICABLE BUILDING CODES.

THE CONTRACTOR SHALL VERIFY REQUIRED LOCATION OF ALL NECESSARY ACCESS PANELS ON PARTITIONS, FLOORS, OR CEILINGS AND COORDINATE EXACT LOCATIONS WITH OWNER BEFORE INSTALLATION.

CONTRACTOR SHALL SWEEP FLOOR AREA IN ADVANCE OF FLOOR OR WINDOW COVERING OR CABINET INSTALLATION EVEN IF THESE ARE TO BE DONE BY OTHERS

CONTRACTOR SHALL SECURE THE BUILDING AT THE CLOSE OF WORK EACH DAY.

BY ENTERING INTO AN AGREEMENT WITH THE OWNER, THE CONTRACTOR REPRESENTS THAT HE HAS VISITED THE JOB SITE, FAMILIARIZED HIMSELF WITH EXISTING CONDITIONS AND NOTED ANY DISCREPANCIES WITH THE CONTRACT DRAWINGS AND OTHER DOCUMENTS.

CONTRACTOR SHALL BRING ANY DISCREPANCIES TO THE OWNER'S ATTENTION PRIOR TO PROCEEDING AND MAY SUBMIT PROPOSAL FOR RESOLVING ALONG WITH ANY ADDITIONAL COST OR COST REDUCTION DETAILS IF APPLICABLE.

THE CONTRACTOR SHALL CLEAN THE WORK AND PREMISES PRIOR TO ACCEPTANCE BY OWNER.

THE CONTRACTOR SHALL DEFEND AND HOLD HARMLESS THE ENGINEER, THE OWNER AND OWNER'S AGENTS AND REPRESENTATIVES FROM ANY LEGAL ACTION RESULTING FROM THE CONTRACTOR'S CONDUCT OF THE

CONTRACTOR SHALL SUBMIT SAMPLES OF EXTERIOR AND INTERIOR MATERIALS INCLUDING DOOR HARDWARE AND FINISHES TO THE OWNER FOR APPROVAL PRIOR TO INSTALLATION.

CONTRACTOR SHALL OBTAIN ALL REQUIRED PERMITS INCLUDING MECHANICAL, ELECTRICAL, AND PLUMBING WORK AS NECESSARY. THE CONTRACTOR SHALL FURNISH AND INSTALL ALL PARTITIONS INDICATED ON THE DRAWINGS.

PARTITIONS SHOWN ALIGNED WITH EXISTING BASE BUILDING ELEMENTS SHALL BE INSTALLED FLUSH AND SMOOTH WITH BASE BUILDING ELEMENTS.

CONTRACTOR SHALL REPAIR, REPLACE OR MODIFY ANY FIXTURE, STRUCTURE, WALL, CEILING, EQUIPMENT, FLOOR OR FINISH THAT REQUIRES TEMPORARY DISMANTLING, TEMPORARY REMOVAL, OR ALTERATION IN ORDER TO ACCOMMODATE THE NEW CONSTRUCTION.

ACCESSIBILITY / SAFETY CONTRACTOR SHALL PROVIDE ANY AND ALL LIFE SAFETY EQUIPMENT AS REQUIRED BY LOCAL AND STATE CODES.

DURING CONSTRUCTION, CONTRACTOR SHALL PROVIDE NOT LESS THAN ONE PORTABLE FIRE EXTINGUISHER RATED AT LEAST 2-A AT EACH STAIRWAY ON ALL FLOOR LEVELS WHERE COMBUSTIBLE MATERIALS HAVE ACCUMULATED.

LIGHT AND CONTROL SWITCHES SHALL BE MOUNTED NOT MORE THAN 4'-O'' ABOVE THE FLOOR OR WORKING PLATFORM.

DOOR HANDLES, PULLS, LATCHES, LOCKS AND OTHER OPERATING DEVICES SHALL BE INSTALLED 34 INCHES MINIMUM AND 48 INCHES MAXIMUM ABOVE THE FINISHED FLOOR. (LOCKS USED ONLY FOR SECURITY PURPOSES AND NOT USED FOR NORMAL OPERATION ARE PERMITTED AT ANY HEIGHT.)

DOOR CLOSERS AND STOPS SHALL NOT REDUCE HEADROOM TO LESS THAN 78 INCHES.

INTERIOR WALL AND CEILING FINISHES CLASSIFIED IN ACCORDANCE WITH SHALL BE AS FOLLOWS: (TESTING IN ACCORDANCE WITH ASTM E-84 OR UL-723)FLAME SPREAD INDEX NOT GREATER THAN 200. SMOKE-DEVELOPED INDEX NOT GREATER THAN 450.

ALL EXHAUST FANS TO BE VENTED DIRECTLY TO THE EXTERIOR.

ALL PENETRATIONS OF THE BUILDING ENVELOPE SHALL BE SEALED WITH CAULK OR FOAM.

ALL COMBUSTION APPLIANCES WILL BE VENTED DIRECTLY TO THE EXTERIOR

FURNACE FIREBOX SHALL HAVE OUTSIDE COMBUSTION AIR SUPPLY PURSUANT TO REGIONAL AND LOCAL CODES.

MATERIAL GYPSUM BOARD THICKNESS AND APPLICATION SHALL CONFORM TO IRC

TABLE 702.3.5

ALL FRAMING LUMBER SHALL BE SOUTHERN PINE GRADE 2 OR BETTER UNLESS NOTED OTHERWISE.

ALL OPENINGS IN THE EXT. BLDG. ENVELOPE SHALL BE SEALED AGAINST

AIR INFILTRATION. THE FOLLOWING AREAS MUST BE SEALED.

* JOINTS AROUND WINDOW AND DOOR FRAMES

* JOINTS BETWEEN WALL CAVITY AND WINDOW/DR. FME.

* JOINTS BETWEEN WALL AND FOUNDATION
* JOINTS BETWEEN WALL AND ROOF

* JOINTS BETWEEN WALL PANELS

* UTILITY PENETRATIONS THROUGH EXTERIOR WALLS

WALL PANEL:

B.P. BRACED WALL PANEL 3'-4" MIN. LENGTH w/ 7/16" OSB OR 1/2" PLYWOOD AND 8d COMMONS 6" o/c AT ALL PANEL EDGES, 12" o/c FIELD.

I.B.P. INTERIOR BRACED WALL PANEL
1/2" GYP. BD PER R 602.10.3(5); 1/2 GWB EACH SIDE w/ #6 X 1 1/4
TYPE S OR W SCREWS PER ASTM C1002 @ 7" o/c @ ALL SUPPORTS

A.B.P. ALTERNATE BRACED WALL PANEL
2'-8" MIN. WIDTH w/ 7/16" DSB DR 1/2" PLYWOOD AND 8d COMMONS

2'-8" MIN. WIDTH w/ 7/16" OSB OR 1/2" PLYWOOD AND 8d COMMONS 6" o/c AT ALL PANEL EDGES, 12" o/c FIELD & (2) A.B. PER PANEL LOCATED AT 1/4 POINTS & 1800* MIN. HOLDDOWN EACH END *HPAHD22 OR STD10)

EXTERIOR FINISH
EXTERIOR FINISH MATERIAL AND COLOR TO BE SELECTED BY OWNER.
ROOFING TO BE LIGHT WEIGHT TILE OVER 30 * FELT, 5/8" CDX

PLYWOOD/OSB.

DOWNSPOUTS TO BE COLLECTED AND ROOF RUN OFF TO BE DIRECTED AWAY FROM STRUCTURE. FINISH GRADE SHALL SLOPE AWAY FROM STRUCTURE MIN. 1/2" PER FOOT OF RUN FOR 4'MIN.

WINDOWS AND GLAZING
WINDOWS SHALL BE DUAL PANE WITH WOOD FRAMES (MIN U FACTOR
OF 0.6). MANUFACTURER AND COLOR TO BE DETERMINED BY OWNER.

EVERY BEDROOM SHALL BE PROVIDED WITH AN EGRESS WINDOW WITH FINISH SILL HEIGHT NOT GREATER THAN 44" ABOVE THE FINISH FLOOR HEIGHT AND SHALL HAVE A MINIMUM OPENABLE AREA OF 5.7SQ.FT. EGRESS WINDOWS SHALL NOT HAVE AN OPENABLE AREA LESS THAN 20" WIDE OR 24" HIGH.

SAFETY GLAZING SHALL BE PROVIDED WHERE GLASS IS TO BE USED IN DOORS, WITHIN A 24" ARC OF DOORS AND WHERE THE BOTTOM EDGE IS WITHIN 18" ABOVE THE FLOOR.

SAFETY GLAZING SHALL BE PROVIDED IN DOORS AND ENCLOSURES FOR HOT TUBS, WHIRLPOOLS, SAUNAS, STEAM ROOMS, BATHTUBS, AND SHOWERS.

ALL EXTERIOR DOORS AND WINDOWS SHALL BE FINISHED WITH WEATHER RESISTANT COATINGS AND WEATHERSTRIPPED.

CONTRACTOR SHALL COORDINATE THE SIZES OF ALL ELECTRICAL EQUIPMENT BEING PROVIDED PRIOR TO ANY INSTALLATION AND LAYOUT EQUIPMENT TO SCALE TO ASSURE THAT EQUIPMENT AS SHOWN ON DRAWINGS WILL FIT IN DESIGNATED SPACES.

CONTRACTOR SHALL SUBMIT ALL REQUIRED EQUIPMENT MANUFACTURER DATA AS REQUIRED BY AUTHORITY HAVING JURISDICTION AND ENSURE COOPERATION AND COORDINATION WITH REQUIRED INSPECTIONS.

FLOOR FRAMNG NOTES.
PROVIDE PROPER BLOCKING IF REQUIRED AT ALL FLOOR PENETRATIONS.

PROVIDE JOIST HANGERS AT ALL LOCATIONS AT WHICH JOISTS BUTT UP TO BEAMS OF OTHER BUILT-UP JOISTS -SEE PLANS,

PROVIDE PRESSURE TREATED OR GALVANINZED FLASHING SEPARATION BETWEEN JOIST AND CONCRETE AT ALL LOCATIONS.

REFER TO I-JOIST MANUFACTURERS INSTALLATION DOCUMENTS FOR MISC. FRAMING SITUATIONS.

ELECTRICAL, DATA, & AUDIO NOTES:
HOME OWNER SHALL DO A WALK-THRU WITH RELEVANT INSTALLERS TO
VERIFY THE EXACT LOCATION FOR OUTLETS, LIGHTS, SWITCHES, CABLE,
DATA, PHONE, AUD

MECHANICAL

COMPLY WITH ALL RELEVANT REQUIREMENTS OF 2015 IECC CHAPTER 4
COMMERCIAL ENERGY EFFICIENCY
ANY PIPING INSTALLED UNDER A SLAB MAY NEED INSPECTION OF

INSULATION PRIOR TO COVER.

NEW DUCTWORK OPERATING AT >3" WATER COLUMN (0.11 PSI) REQUIRE

AIR LEAKAGE TESTING.

AIR ECONOMIZERS SHALL MEET CODE REQUIREMENTS FOR DESIGN CAPACITY, CONTROL SIGNAL, VENTILATION CONTROLS, HIGH-LIMIT SHUT-OFF, INTEGRATED ECONOMIZER CONTROL, AND PROVIDE A MEANS TO RELIEVE EXCESS OUTSIDE AIR DURING OPERATION.
HEATING AND COOLING TO EACH ZONE SHALL BE CONTROLLED BY A THERMOSTAT WITH AT LEAST ONE HUDITY CONTROL DEVICE PER INSTALLED HUMIDIFICATION / DEHUMIDIFICATION SYSTEM.
HEAT PUMPS REQUIRE MINIMUM EFFICIENCY OF 7.70 HSPF & 13.00 SEER

PIPING INSULATION EXPOSED TO WEATHER SHALL BE PROTECTED FROM DAMAGE INCLUDING BUT NOT LIMITED TO THAT DUE TO SUN, MOISTURE OR WIND.

PROVIDE AN AIR AND/OR HYDRONIC SYSTEM BALANCING REPORT FOR HVAC SYSTEMS.

HVAC SYSTEMS INCLUDING CONTROL SYSTEMS & ECONOMIZERS AS RELEVANT SHALL BE TESTED TO ENSURE PROPER OPERATION HVAC COMMISSIONING PLAN SHALL BE DEVELOPED BY AND REGISTERED DESIGN PROFESSIONAL OR APPROVED AGENCY.

OWNER SHALL BE PROVIDED WITH FINAL COMMISSIONING REPORT FOR HVAC SYSTEMS WITHIN 90 DAYS OF RECEIPT OF CERTIFICATE OF OCCUPANCY.

PROVIDE O&M MANUALS FOR HVAC SYSTEMS WITHIN 990 DAYS OF SYSTEM ACCEPTANCE.

HEATING OF ANY UNENCLOSED SPACE SHALL BE BY RADIANT HEAT

THERMOSTATIC CONTROLS SHALL HAVE A 5 DEGREE F DEADBAND. ANY ZONE WITH SEPARATE HEATING AND COOLING THERMOSTIC CONTROL SUCH CONTROLS SHALL HAVE SETPOINT OVERLAP RESTRICTIONS.

EACH ZONE SHALL HAVE SETBACK CONTROLS VIA PCS OR AUTOMATIC TIME CLOCK.

THERMOSTATIC SETBACK CONTROLS SHALL HAVE THE CAPABILITY TO SET BACK OR TEMPORARILY OPERATE THE SYSTEM TO MAINTAIN ZONE TEMPERATURES DOWN TO 55°F (13°C) OR UP TO 85°F (29°C). AUTOMATIC TIME CLOCK OR PROGRAMMABLE CONTROLS SHALL BE CAPABLE OF STARTING AND STOPPING THE SYSTEM FOR SEVEN DIFFERENT DAILY SCHEDULES PER WEEK AND RETAINING THEIR PROGRAMMING AND TIME SETTING DURING A LOSS OF POWER FOR AT LEAST 10 HOURS. ADDITIONALLY, THE CONTROLS SHALL HAVE A MANUAL OVERRIDE THAT ALLOWS TEMPORARY OPERATION OF THE SYSTEM FOR UP TO 2 HOURS; A MANUALLY OPERATED TIMER CAPABLE OF BEING ADJUSTED TO OPERATE THE SYSTEM FOR UP TO 2 HOURS; OR AN OCCUPANCY SENSOR.

CAPACITY OF HVAC SYSTEMS AND EQUIPMENT SHALL NOT EXCEED CALCULATED LOADS.

CONTRACTOR SHAL PROVIDE DOCUMENTATION AND CALCULATIONS SUPPORTING HVAC SYSTEM SIZING AND CAPABILITY.

SYSTEMS

HEAT PUMP CONTROLS SHALL PREVENT SUPPLEMENTAL ELECTRIC RESISTANCE HEAT WHERE INSTALLED,

MAX OUTDOOR LIGHTING - 888 WATTS

INSTALL AUTOMATIC CONTROLS TO SHUT OFF ALL LIGHTS EXCEPT FOR EMERGENCY EGRESS & THOSE CONTROLLED BY MOTION / OCCUPANCY SENSORS.

INSTALL MOTION / OCCUPANCY SENSORS TO CONTROL LIGHTS IN ALL AREAS OF BUILDING.
INSTALL SEPARATE SWITCHES FOR LIGHTING IN DAYLIGHT ZONES N THE BUILDING.

MAX OUTDOOR LIGHTING - 888 WATTS
INSTALL AUTOMATIC CONTROLS TO SHUT OFF ALL LIGHTS EXCEPT FOR
EMERGENCY EGRESS & THOSE CONTROLLED BY MOTION SENSORS.
ALL LIGHTING SYSTEMS SHALL BE TESTED TO ENSURE PROPER
CALIBRATION, ADJUSTMENT, PROGRAMMING AND OPERATION.
INTERNALLY ILLUMINATED EXIT SIGNS SHALL NOT EXCEED 5 WATTS

ENERGY CONSERVATION

PER FACE.

ALL SOURCES OF AIR LEAKAGE IN THE
BUILDING THERMAL ENVELOPE ARE TO BE SEALED, CAULKED, GASKETED,
WEATHER STRIPPED OR WRAPPED AS APPROPRIATE WITH MOISTURE
VAPOR-PERMEABLE WRAPPING MATERIAL.
TOTAL VERTICAL FENESTRATION = 5.4% OF ABOVE-GRADE WALL
BUILDING HAS NO SKYLIGHTS

FOR INFORMATION CONTACT	ALBERT SOLANO 7675 TARA BLVD JONESBORO, GA 30236	
LOCATION	162 S MAIN STREET Jonesbord, ga 30236	
SHEET TITLE	GENERAL NOTES	
	REVISIONS	
NO 1	DATE	
2		
3		
	DRAWN BY RLH	
Dat	e 4/13/2021	
Sca	le ³ / ₁₆ "=1'-0"	
	DWG No.	
	A13	



MEMORANDUM

To: Albert Solano

162 South Main Street Jonesboro, Ga 30236

From: David D. Allen

City of Jonesboro 124 North Avenue Jonesboro, GA 30236

Date: October 28, 2022

Re: Notification of Request for Design Review Commission – Exterior Modification;

162 South Main Street; Parcel No. 13241D E006;

Dear Applicant,

This letter is to serve as notification that the City of Jonesboro, Design Review Commission, has accepted your request for review of exterior modifications for the property located at 162 South Main Street, Jonesboro, Georgia.

The review meeting will be conducted by Commission members at 1859 City Center Way on Wednesday, November 2, 2022 at 4:30 pm. You are invited to attend if you wish. If you are unable to be a part of the meeting, then you will be informed of the recommendation on the following day.

Sincerely,

David D. Allen

Community Development Director / Zoning Administrator